

MULTI V™ i

Highlights



Energy savings



Reliability



Low noise



Advanced performance

- Air-cooled VRF Heat Pump & Heat Recovery
- 22.4kW ~ 268.8kW (Cooling capacity based)
- 3Ø, 380 ~ 415V, 50Hz
- Top discharge outdoor unit
- Ability to function as Heat Pump or Heat Recovery


How does it work?




Dual Sensing




Partial Defrost



Interchangeable between
heat pump and heat recovery

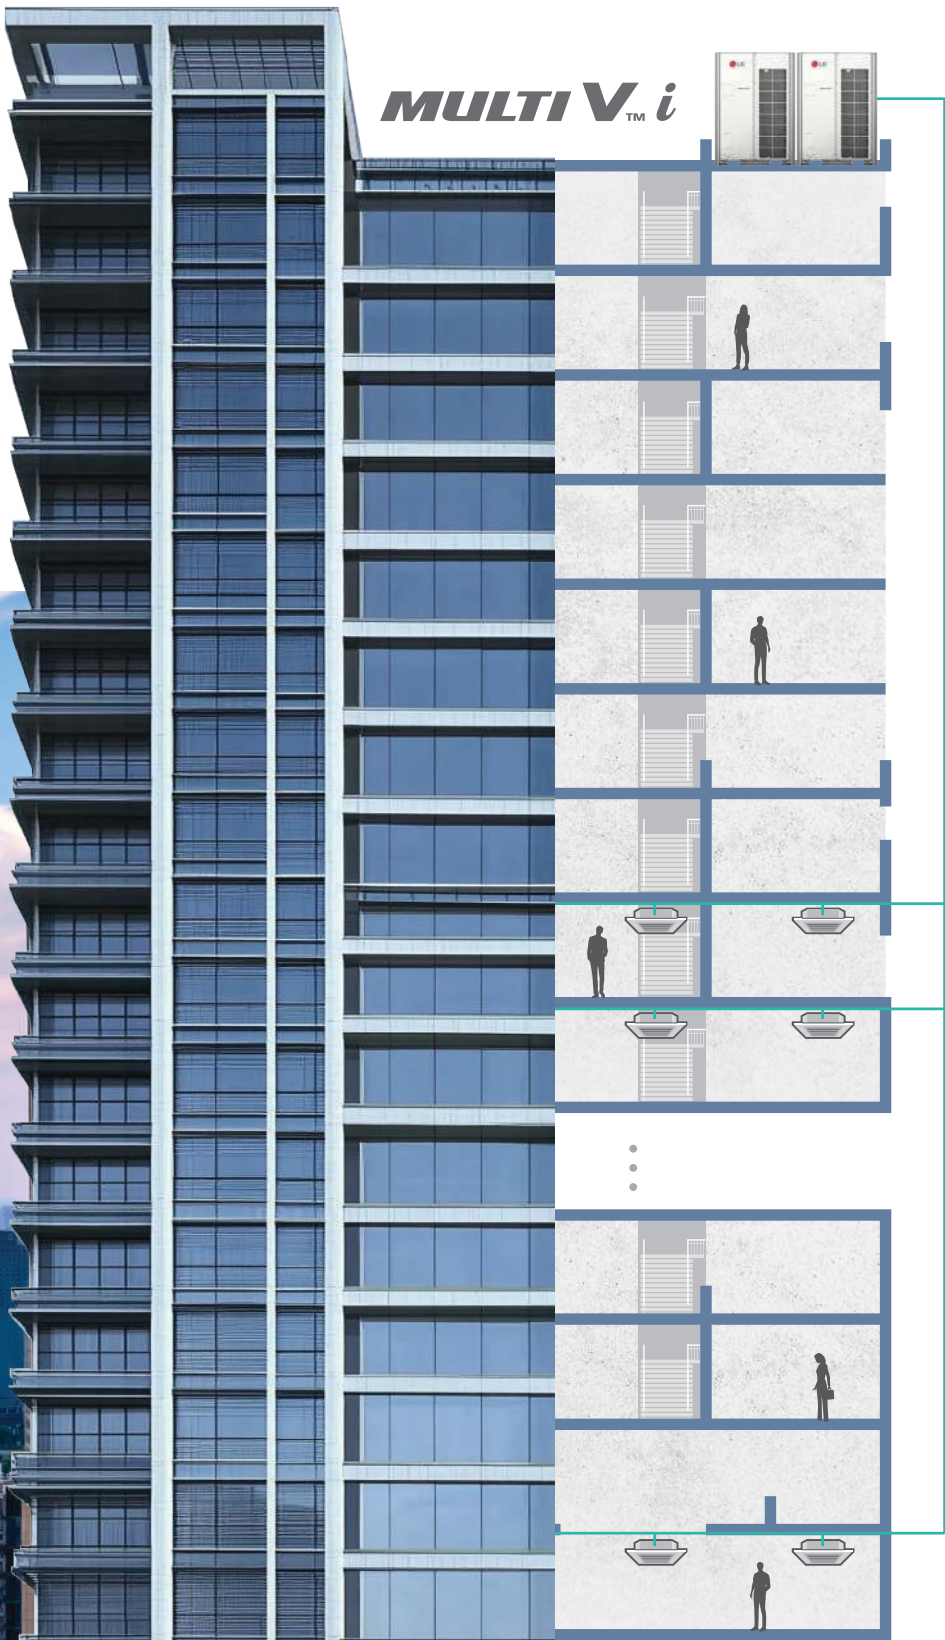

01 INNOVATIVE

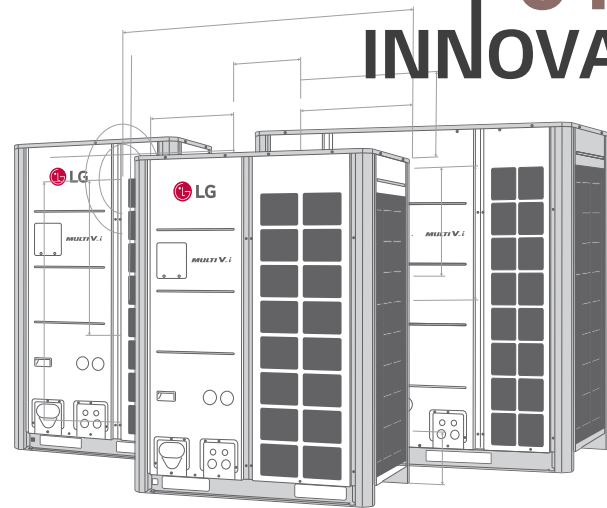

Innovative Energy efficiency / Performance realization

- Maximum 26HP for a Single Outdoor Unit
- Compact Design with Larger Capacity
- Powerful Performance
- Powerful Cooling Performance
- Powerful Heating Performance
- Newly Designed Compact Fan
- Flexible Outdoor Units Combination
- Corrosion Resistant

02 INTELLIGENT

Recognizes various environments & optimizes itself through its AI Engine

AI EFFICIENCY UP

- AI Smart Care
- AI Energy Waste Alert
- AI Energy Management

AI COMFORT UP

- Noise Adaptive Control
- Noise Target Control
- Weather Information Interlocking Control

AI SMART UP

- AI Smart Diagnosis
- Large Capacity Black Box
- Auto Tuning System



03 INTERACTIVE

Upgrading & evolutionary system according to customer

- LG's Control Solution
- Smart GUI

- New Innovative Controller



Interlocking System

- A/C (Air Conditioner)
- LG AHU
- Valve / Pump AO (Analog Output)
- Occupancy Sensor / Alarm / Key-Tag DI (Digital Input)
- Fan / Lighting / Switch DO (Digital Output)
- Temperature / Humidity / CO₂ Sensor AI (Analog Input)




Maximum 26HP for a Single Outdoor Unit

LG MULTI V i saves space, time, and installation costs by offering a larger capacity single outdoor unit.




Compact Design with Larger Capacity

Lighter outdoor units reduce the installation area and architecture structure, increasing the space for roof gardens.

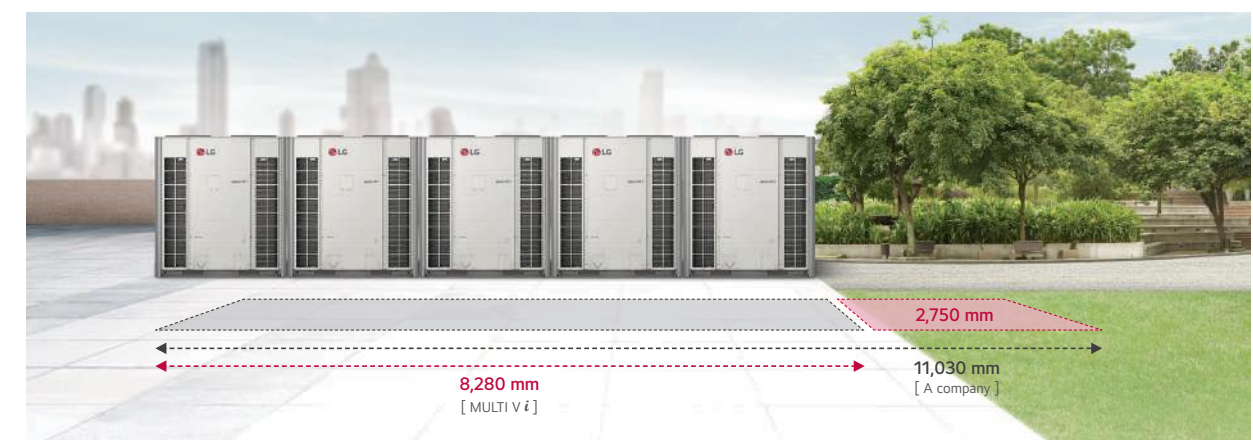

Install 260HP

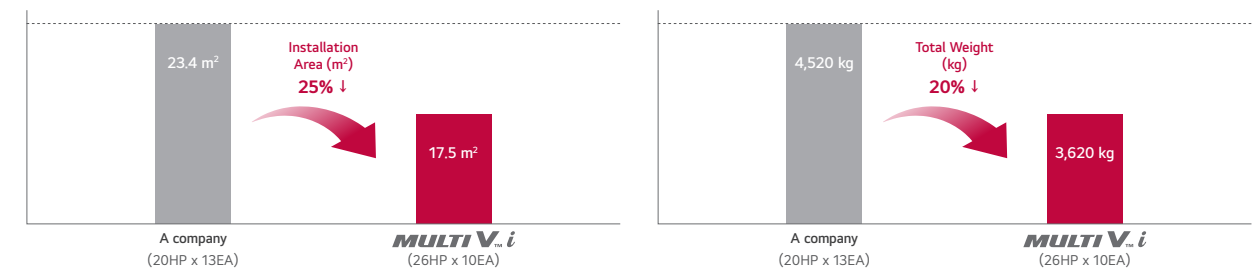

※ Previous model: ARUM261LTE5, New model: ARUM260LTE6
 ※ This scene is designed only for easier understanding, because 26HP unit cannot be applicable.

Powerful Performance

MULTI V 5 has already proved itself highly competitive in the European market in terms of efficiency levels, but MULTI V *i* exceeded its predecessor.


[Better than the Best]



※ For certain models in the line-up.

Powerful Cooling Performance


Reliable cooling operation up to 52°C, with full performance at 43°C. End users are able to enjoy comfortable indoor environments, even with extreme weather conditions outside.

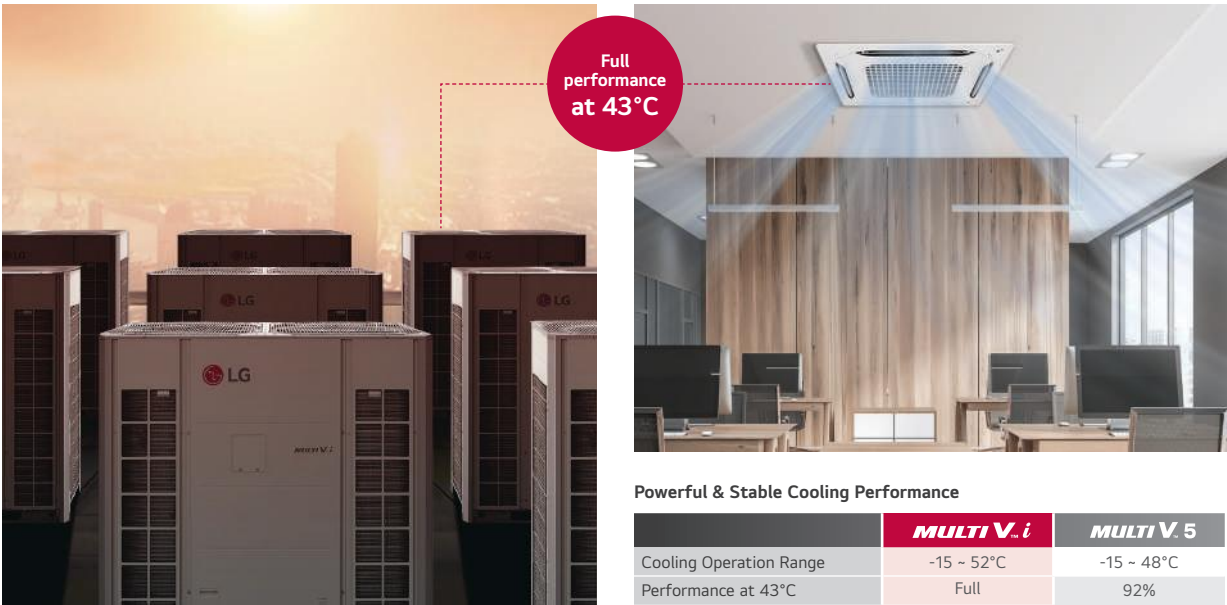

※ Final specifications may change slightly.

Powerful Heating Performance

More reliable heating operation is provided at down to -30°C and full performance at -10°C. Stable heating performance is guaranteed even in the case of an unexpected outdoor temperature drop.


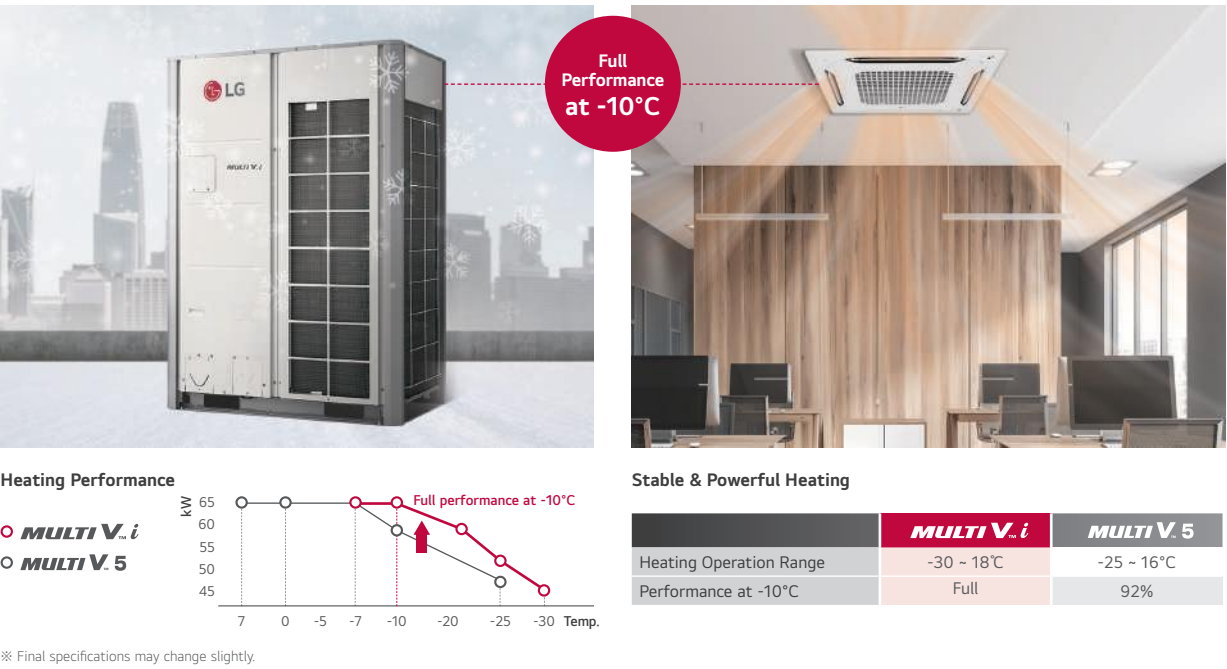


Improved design

Improved design for defrost with an independent HEX system and accumulated freezing prevention design. With a differentiated structure and design, it provides longer heating time and reduced defrost time.

Continuous Heating


The heating operation duration was extended by independent HEX system for defrosting.

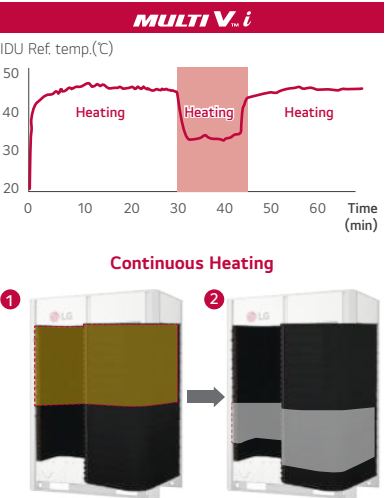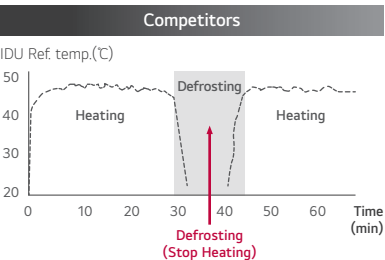

※ The defrost process is simplified for easier understanding.

NEW Accumulated Freezing Prevention Design


Preventing the freezing of the lower part of the heat exchanger

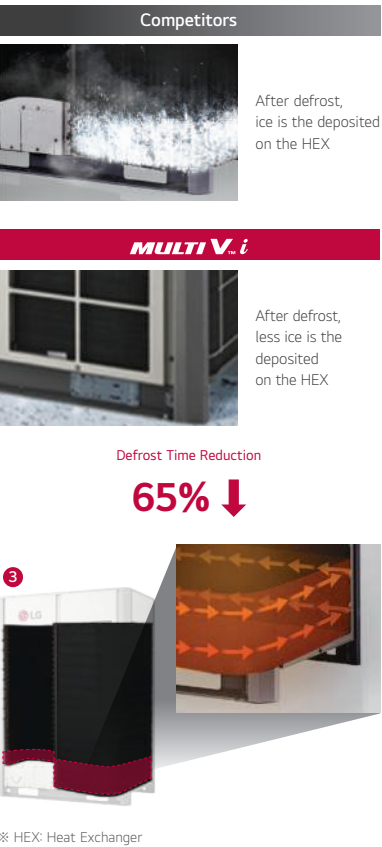

※ HEX: Heat Exchanger


Newly Designed Compact Fan

The design of a new biomimetic fan was inspired by nature. It brings more air volume and less noise with the same air flow rate compared to the conventional system.

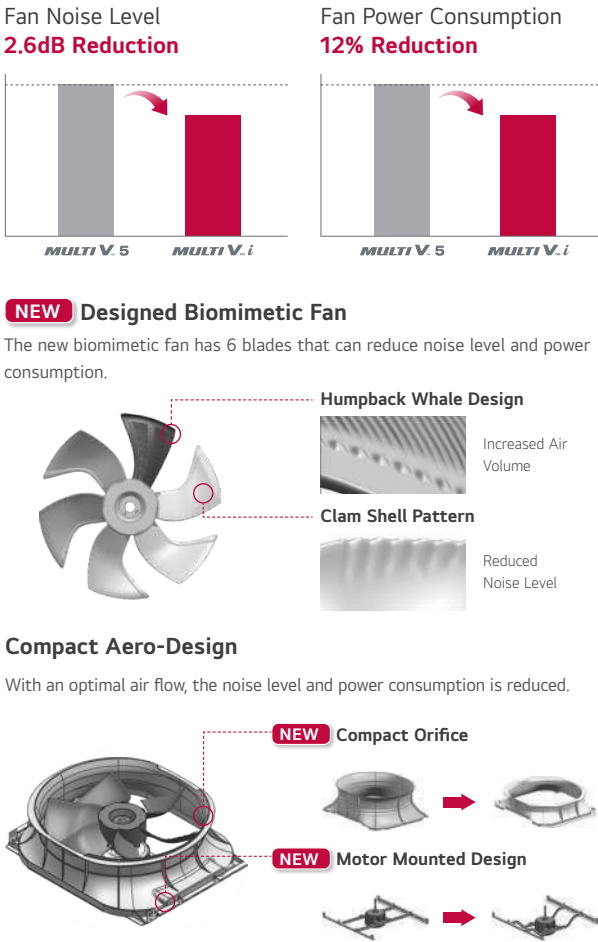

Flexible Outdoor Unit Combination


Flexible combination can contribute to faster delivery and installation. It provides more options for designing according to customers' preferences.

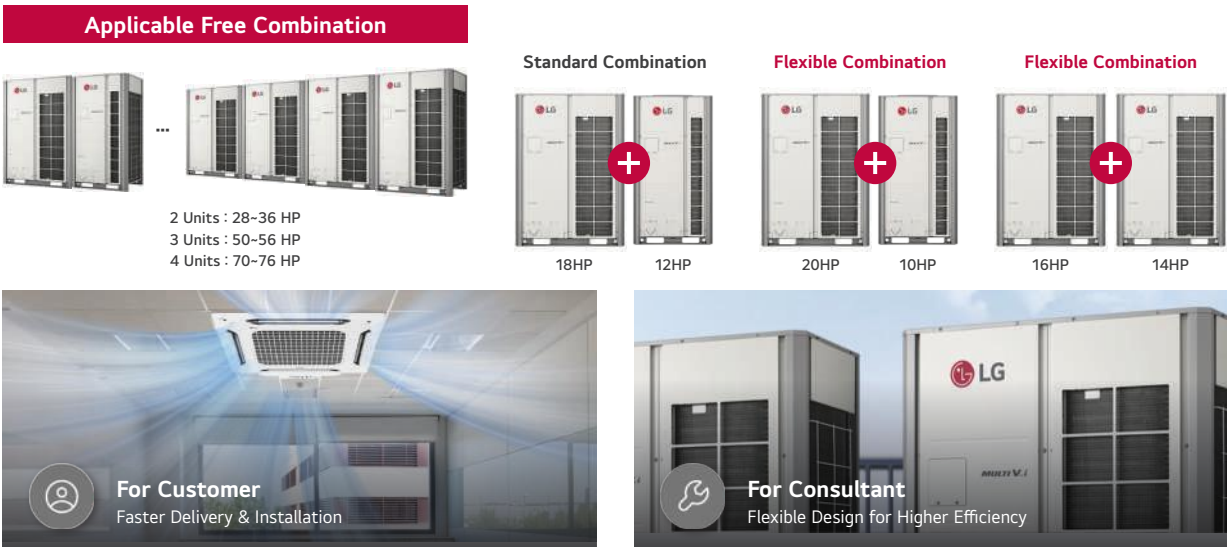


※ The UXC chassis models are not applicable to free combination.
※ The 26 HP model of UXC chassis cannot be combined with other models.
※ More information can be checked in the LATs tool.

Corrosion Resistant

"Corrosion Resistant Black Fin" heat exchanger is designed for improved corrosion resistance. Body panels are also designed for improved corrosion resistance. 2,000 hours for body panels and 10,000 hours for heat exchanger make the product more reliable for customers.

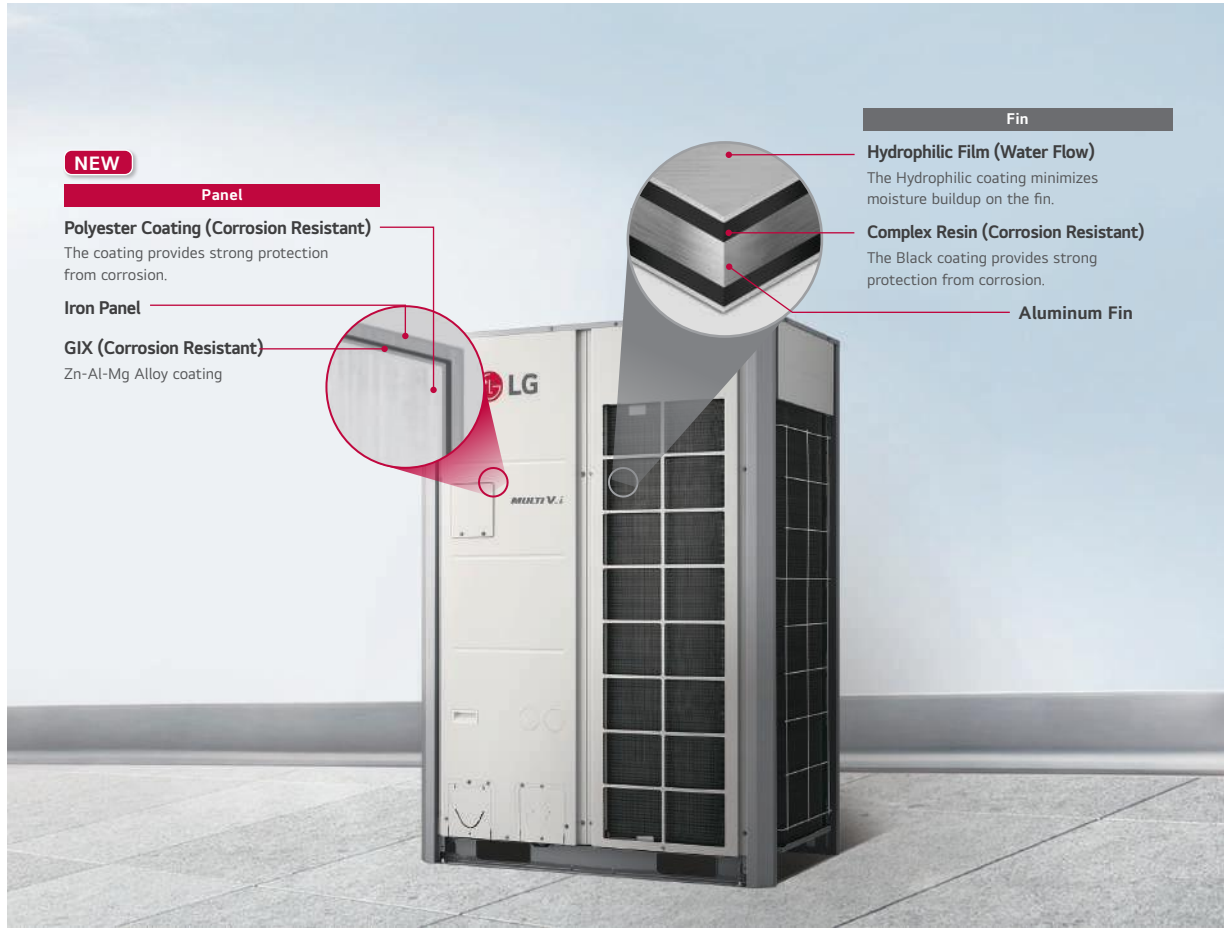


Salt Spray Test (SST) × Process repeated
0.05% Area of defects compared to initial state.



Fog¹⁾
(35°C, 24hr)




※ Verification of corrosion resistance performance
- Test Method B of ISO21207
- ASTM B117 / (2,000 hours) (Last updated : Jul. 2022)



Test process is conducted according to ASTM B117
1) Salty water concentration : NaCl aqueous solution (5%)


Salt Spray Test (SST) × Process repeated
0.05% Area of defects compared to initial state.



Fog¹⁾
(35°C, 24hr)



※ Verification of corrosion resistance performance
- Test Method B of ISO21207
- ASTM B117 / ISO 9227 (5,000 hours →10,000 hrs.) (Last updated : Dec. 2020)







Test process is conducted according to ASTM B117.
1) Salty water concentration : NaCl aqueous solution (5%)

※ The product is not fully anticorrosive. To install near the sea, additional measures can be required.

AI Smart Care


It autonomously implements solutions by adjusting the running time to reach target as well as taking into consideration the best efficiency point to operate in order to save energy.

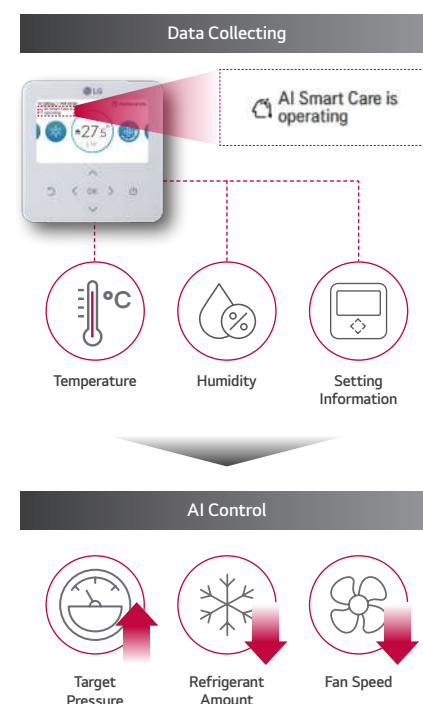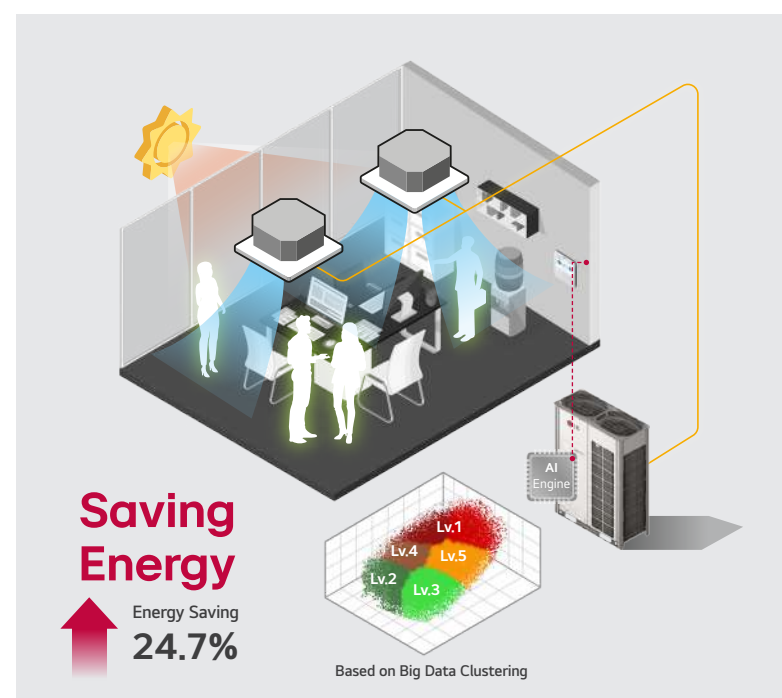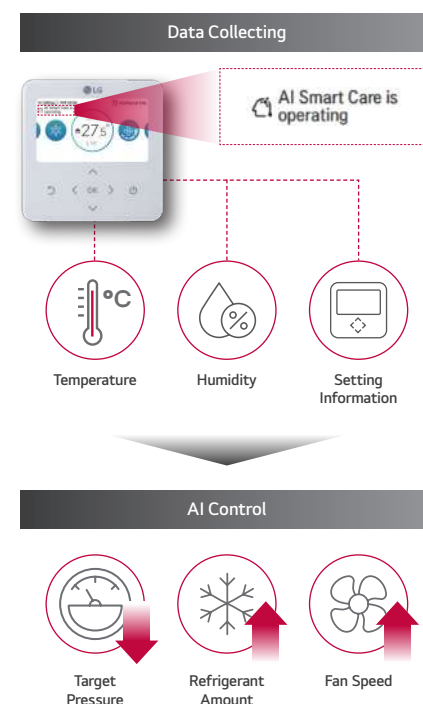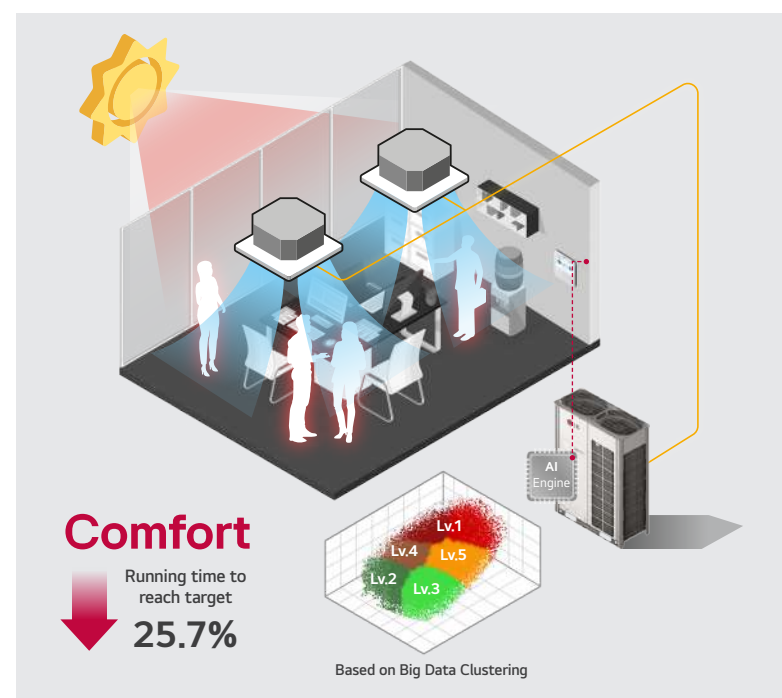

※ The feature above is to help customers understand, and detailed logic may vary depending on the actual environment.
 ※ This is the internal test that is followed KS Standard (Model : 24 HP of MULTI V / Test condition : KS B ISO 15042 : 2006)
 ※ The value of energy saving is the result of comparison AI Smart Care and normal operation.

AI Energy Waste Alert


MULTI V *i* learns usage patterns and prevents energy waste by judging abnormal operation when it is not normally operated. It can be saved energy by displaying a notification or automatically stopping operation.

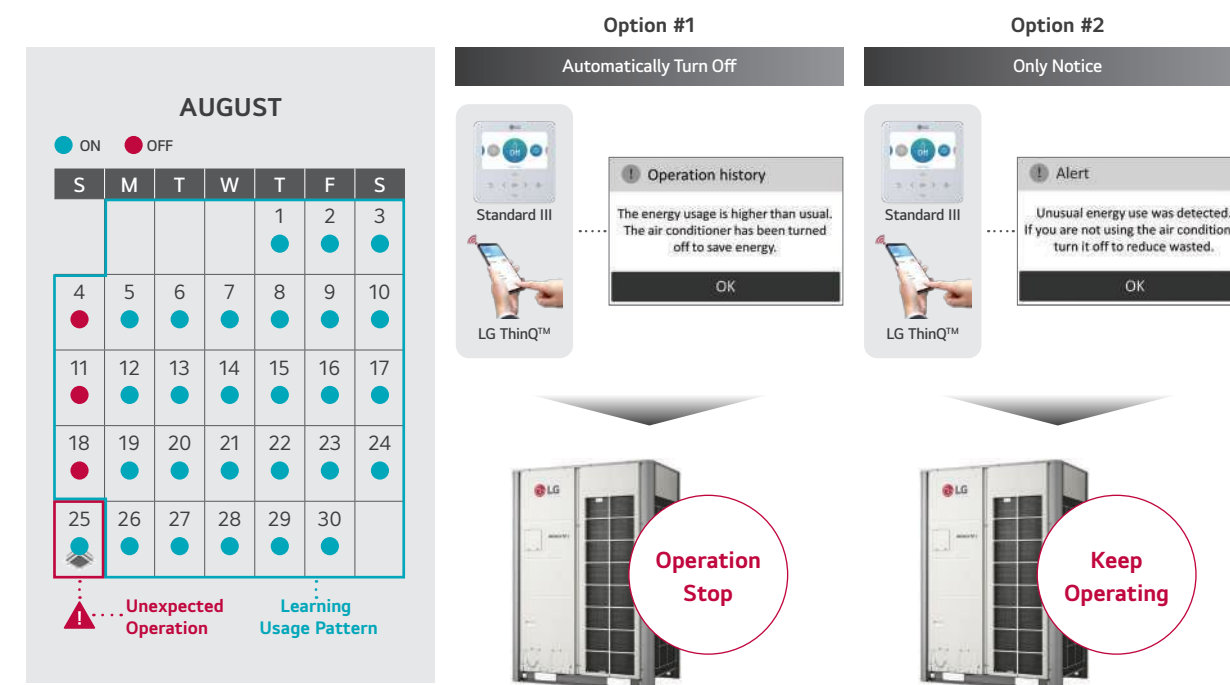

- ※ To use this function, at least 2 weeks of usage pattern learning period is required.
- ※ The waste alert will be displayed at least 2 hours after the indoor unit is turned on.

AI Energy Management

MULTI V *i* is able to preset monthly energy usage and consume power according to the target that has been previously set. By comparing and analyzing previous power consumption of the current month and planned daily energy usage, overuse of the HVAC system operational costs can be prevented by AI Energy management.

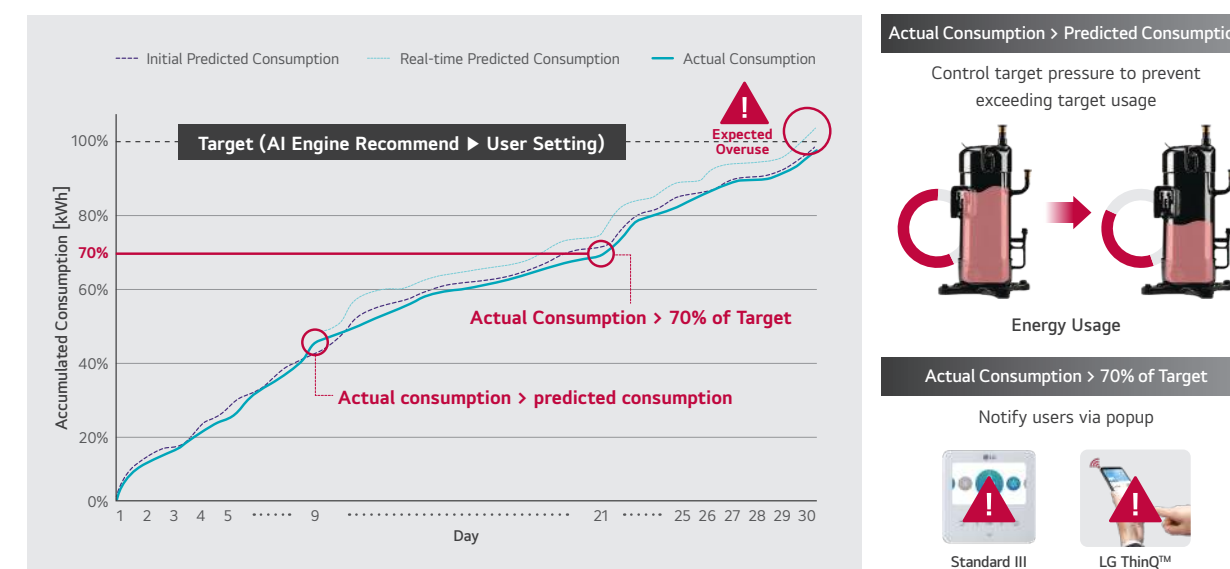

- ※ The above image is a graph for better understanding. Results may vary depending on the environment.
- ※ If more accurate status for energy consumption is needed, ACP and PDI have to be installed.
- ※ To alarm for exceeding 70% of target consumption, the user should activate the Alarm PopUp Setting function on the Wired Remote Controller (Purchase Separately) in advance.
- ※ To use the above function, users should input the monthly target consumption on the wired remote controller (For the usage period of less than 1 year, the recommended target consumption is displayed, and for the usage periods of more than 1 year, the previous year's consumption is displayed.)

Noise Adaptive Control

MULTI V *i* calculates the appropriate noise by considering the background noise and the user's location and operates with the limited noise. And the product noise does not exceed the background noise, users will not be disturbed by the product noise.



※ AI Engine calculates the target noise considering background noise and distance between the product and the user (Sound pressure).
※ To use the above function, the installer should input the installation distance between the product and the user.
※ After powering on the outdoor unit, the AI engine needs 10 minutes to measure and judge the background noise.
※ The operation may differ according to the environment, and noise reduction may impact the performance.


Noise Target Control

The outdoor unit's noise can be restricted by the set sound level in advance, allowing customers to enjoy comfortable conditions while avoiding disturbing their neighbors and complying with the local noise regulations.




Weather Information Interlocking Control

This feature allows MULTI V *i* to provide environmentally optimized performance such as preheating, snow removal, air cleaning display and comfortable power saving mode display according to the weather information (live and forecast) received from AccuWeather.

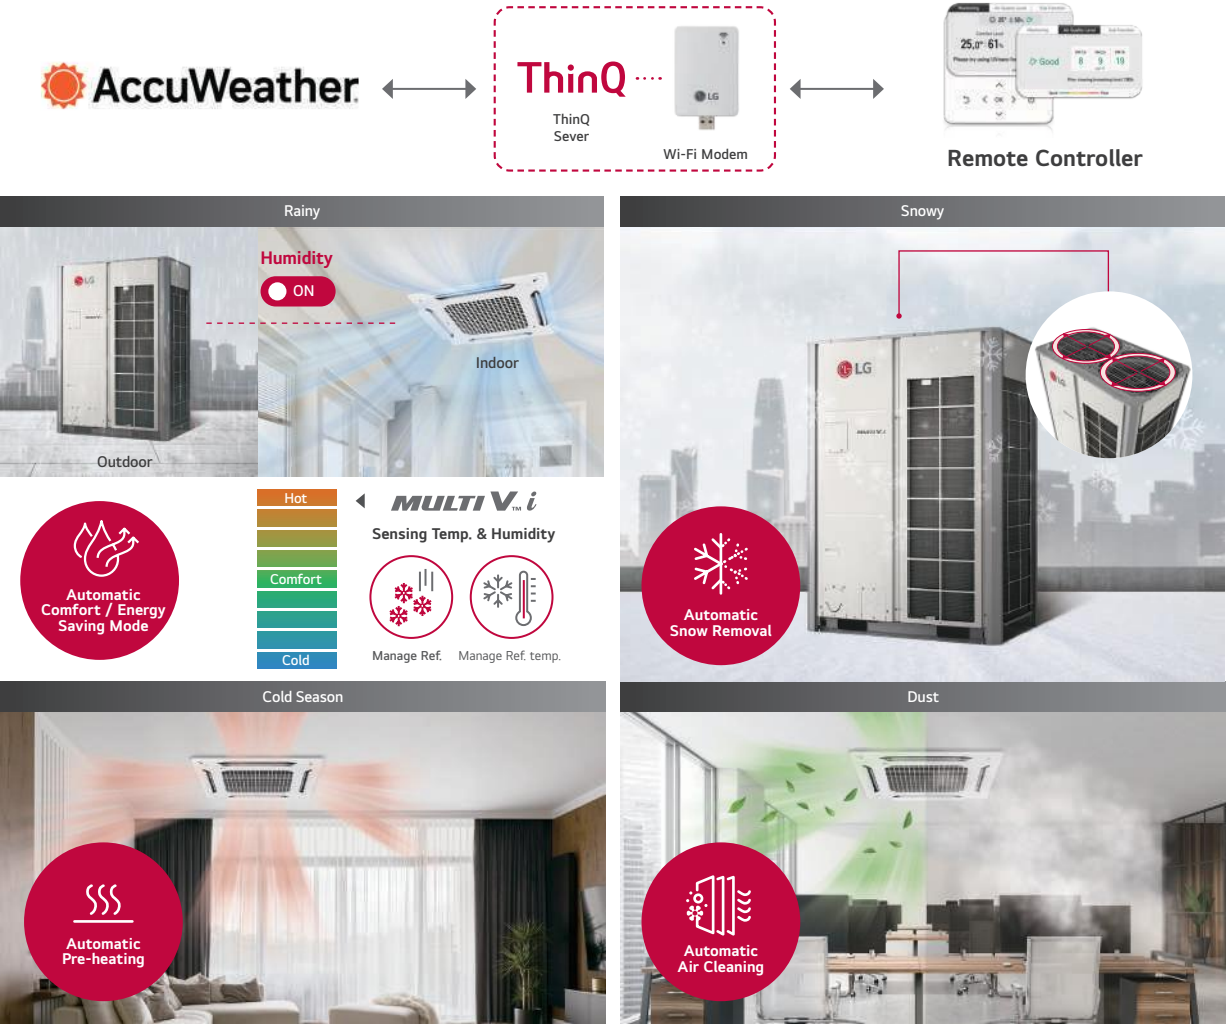

AI Smart Diagnosis


AI Smart Diagnosis saves service time and provides for reliable LG MULTI V *i* operation by automatically analyzing and visualizing the product's performance status.

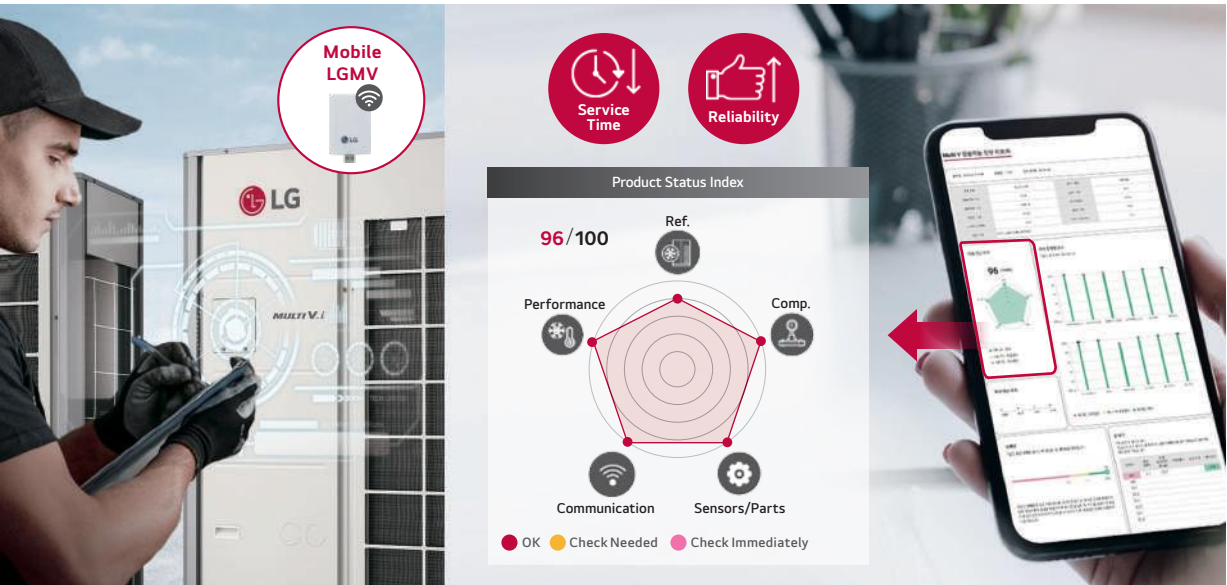

※ UI may be changed without notification.


Large Capacity Black Box

Quick Service can be done because the large-capacity black box in the AI engine stores up to Max 6 months of operation data and 100 failure-events information.

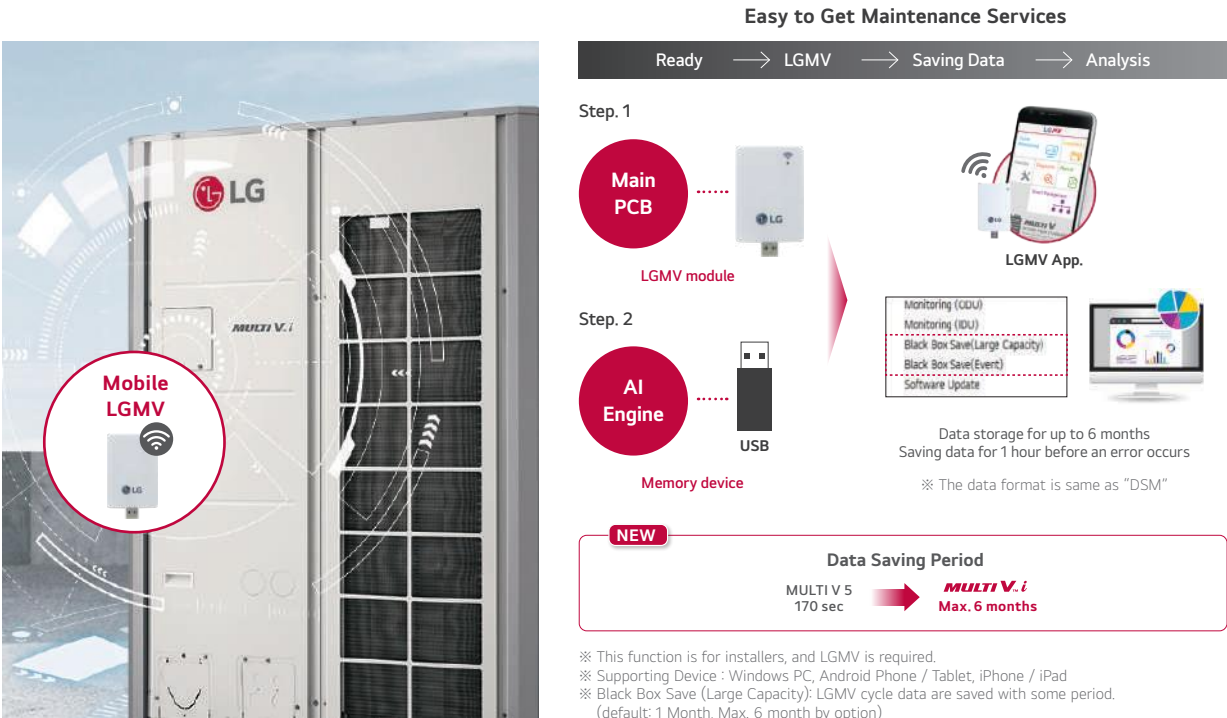

Auto Tuning System


LG MULTI V i provides a new experience to customers with faster and easier installation and service.

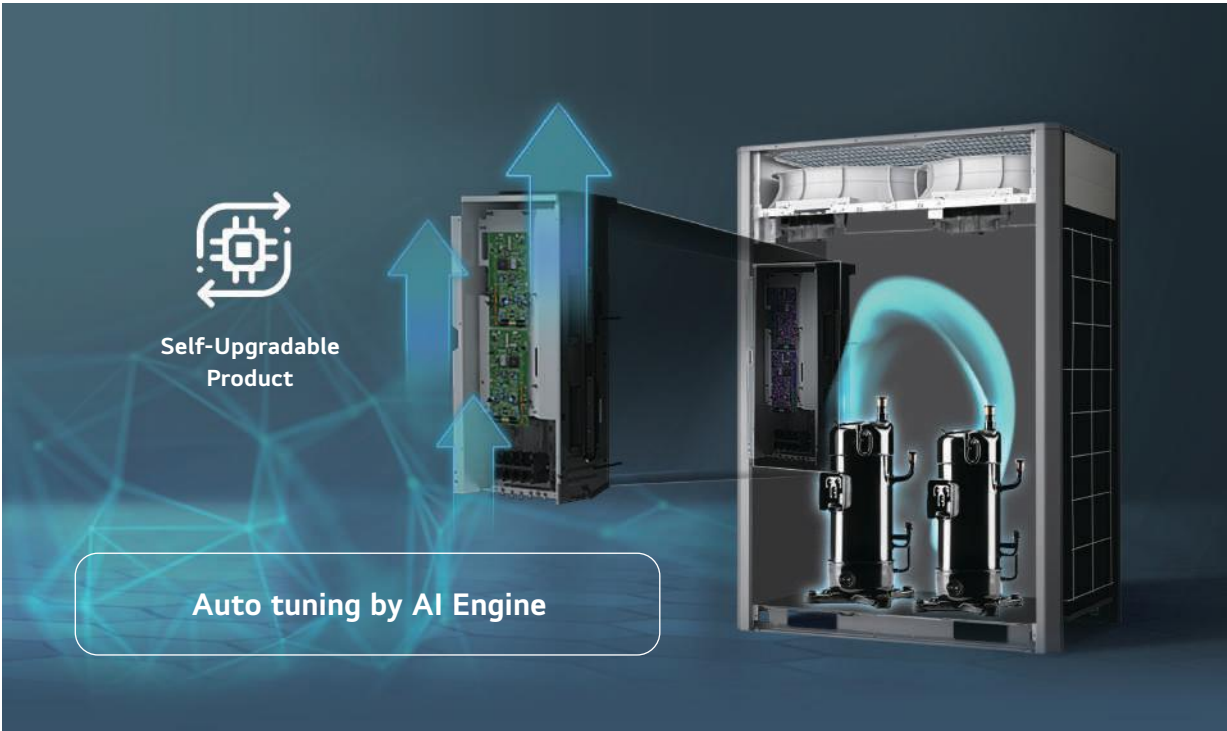

※ This function is to be applied to compressor and fan motor.

LG's Control Solution

LG MULTI V i offers a diverse range of effective control solutions that satisfy the specific needs of each building and its user scene.

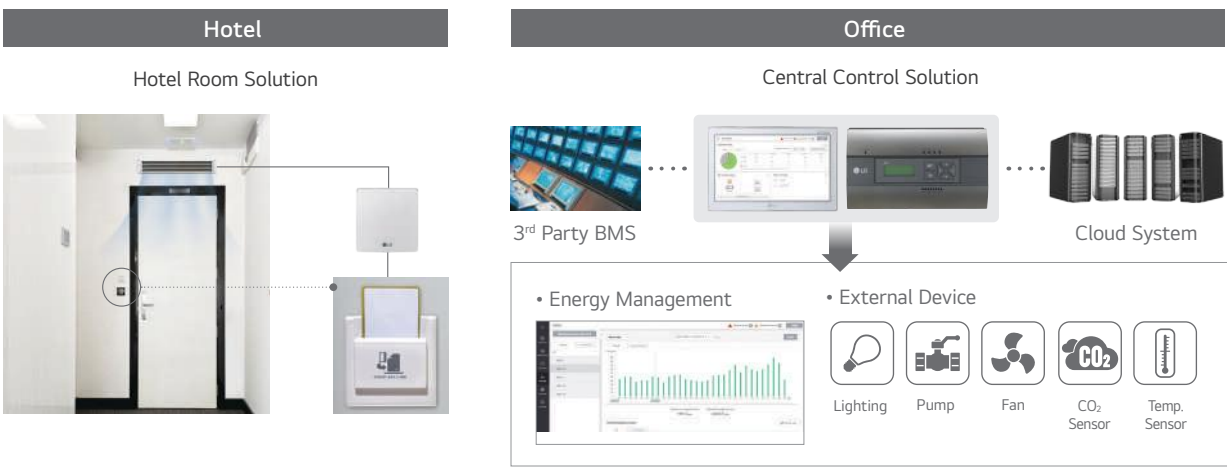

Smart GUI

Smart GUI allows remote management via various devices such as PC, tablet and smart phone.

Monitoring room
PC

Checking each room
Tablet

Working outside
Mobile

Schedule Function

Energy Management

Operation Trending Report

Automatic E-mail Sending

New Innovative Controller

LG Deluxe remote controller provides better customer experiences. (It's easy to use, with E-saving and simple maintenance.)



Features

- Installation wizard
- Built-in Wi-Fi with ThinQ Capability
- Humidity / Proximity sensor
- Seven (7) Day Scheduling with Mode - Home / Away / Sleep / Awake
- Function Code search Tool

Full Touch & Easy Access




LG Deluxe has full touch LCD screen & slim design suitable for the residential application. In addition, user-oriented UX design enhances user convenience.

Air Quality Monitoring



LG Deluxe can display air quality status when the air purifying device is installed. It also shows air quality monitoring history by day, week, month and year.

Pre-set Schedule



Seven Day scheduling with Home/Away/Sleep/Awake mode makes configuration much easier. And seasonal program setting offers more flexibility.

Energy Navigation



The Energy Navigation provides system operation trend per day. Running time and power consumption is also provided compared to last year by week, month and year.

Remote Control



The built-in Wi-Fi module makes the connection to ThinQ cloud simple and easy. Seven day schedule is synchronized between ThinQ cloud and wired remote controller.


Easy Installation



The installation wizard helps the customer set up the basic configurations (Date & Time, Language, Temperature unit etc.) easily during installation.

Simpler Installation by Free HR Unit Function

When an indoor unit is used solely for cooling or heating, it can be connected to the simultaneous system without the need to connect to the HR unit, allowing it to operate seamlessly.

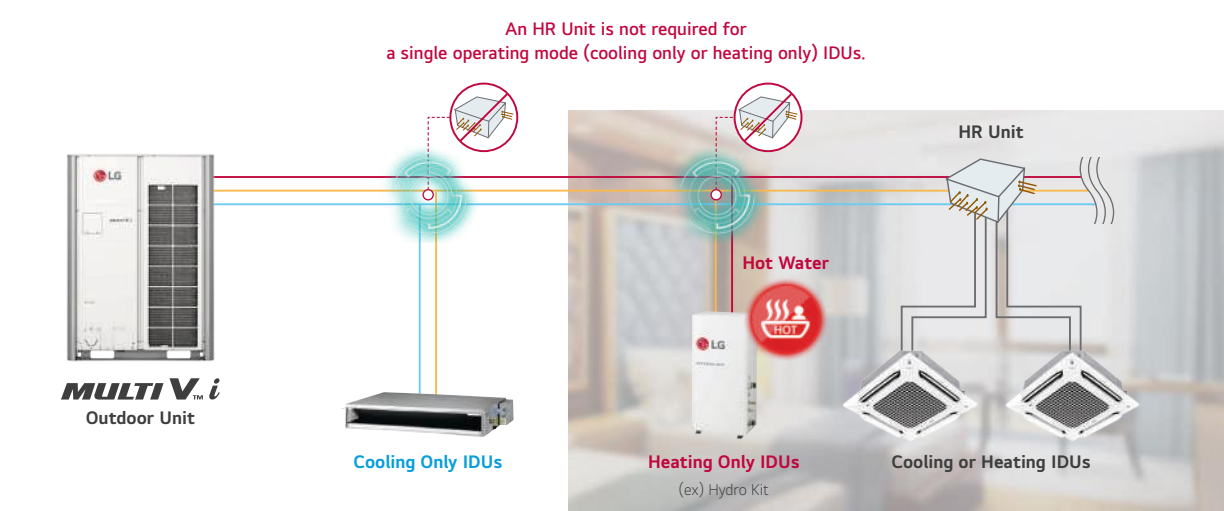

Features

- Applicable in sites where cooling, heating and hot water are simultaneously needed (ex. hotel, hospital, etc.)
- Save time and money with the Free HR Unit Function (Cost reduction through fewer HR units, piping installations and reduced labor)


※ This function will be available within 1H, '25 (This function application schedule may be changed without notification).

AI Engine Function Application


Category	Sub Category	Tool	Application Date ¹⁾ (Based on MP)	AI Engine Function							
				AI Smart Care	AI Indoor Space Care	AI Smart Metering	AI Energy Management	Noise Adaptive Control	AI Energy Waste Alert	AI Smart Diagnosis	Large Capacity Black Box
Cassette	Dual Vane 4 Way	TM-A / TP-B	available	●	●	●	●	●	●	●	●
	1 Way	TU / TT	available	●	●	●	●	●	●	●	●
	2 Way	TS	available	●	●	●	●	●	●	●	●
	Round	TY	available	●	●	●	●	●	●	●	●
	Mini 4 Way	TQ / TR	available	●	●	●	●	●	●	●	●
Duct	Low Static	L4 / L5 / L6	available	●	X	●	●	●	●	●	●
	High Static	B8	available	●	X	●	●	●	●	●	●
	Mid Static	M1 / M2 / M3	available	●	X	●	●	●	●	●	●
Floor Standing		CE / CF	available	●	●	●	●	●	●	●	●
Convertible*	Ceiling Suspended	VM1 / VM2	Feb.'25	●	●	●	●	●	●	●	●
Console*		QA	Feb.'25	●	●	●	●	●	●	●	●
Floor Standing (PAC)*		PT3 / PF2	Feb.'25	●	●	●	●	●	●	●	●
Wall Mounted*	Artcool, Standard	SJ / SK / SR	available	●	X	●	X	●	●	●	●

※ Indoor units produced from 2020.
- AI Functions available via indoor units' Main PCB Onboarding.
- AI Functions available of marked models(*) by replacing indoor units' Main PCB.
1) Application Date is subject to change.

Nomenclature

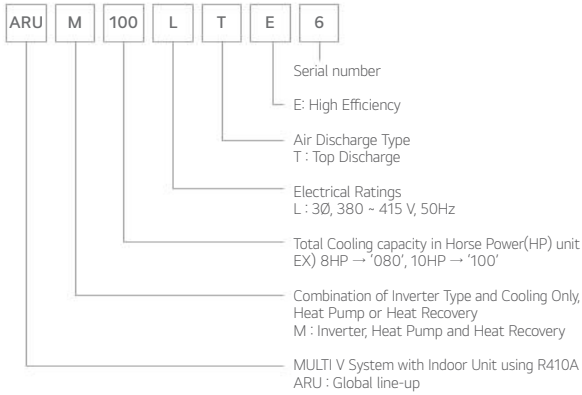

Position of Sound Pressure Level Measuring

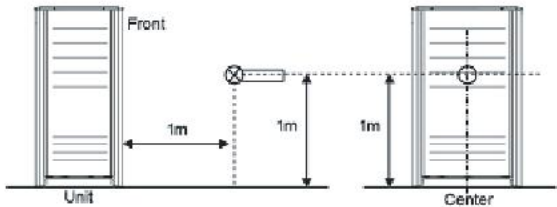

- Data is valid at diffuse field condition.
- Data is valid at nominal operating condition.
- Reference acoustic pressure 0dB = 20μPa.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Refer to the model specifications for nominal conditions (Power source and Ambient temperature, etc).
- Sound levels can be increased in accordance with installation and operating conditions. (Operating conditions include some functional condition like Static pressure mode, air guide use, Room target temperature setting, etc and these functions are different in accordance with each model).
- Sound level will vary depending on a range of factors such as the construction (acoustic absorption coefficient) of particular room in which the equipment is installed.

Outdoor Units Function


Category	Functions	Value
Reliability	Defrost / Deicing	○
	High Pressure Switch	○
	Phase Protection	○
	Restart Delay (3-minutes)	○
	Self Diagnosis	○
	Soft Start	○
Convenience	Compressor Balanced Operation	○
	Test Function	○
	Night Low Noise Operation	○
	Peak Control	○
	Mode Lock	○
	SLC (Smart Load Control)	○
Special Functions	Linear Bypass Cycle	○
	Noise Target Control	○
	Weather Information Interlocking Control	○
	Comfort Cooling	○
	ODU Dry Contact Function	○
	High Static Pressure Compensation	○
	Continuous Cooling	○
	Continuous Heating (Partial Defrost)	○
	Convenient Energy Check	○
	Automatic Tuning Upgrade	○
	Remote Software Upgrade	○
	AI Smart Care	○
	AI Indoor Space Care	○
	AI Energy Target Control	○
	AI Smart Diagnosis	○

O : Applied, X : Not applied
- Accessory : Ordered and purchased separately the accessory package referring to the model name provided and install at field.
- Accessory line-ups varies by region, so check your local catalogue or local sales material

Cooling / Heating Operation


Cooling

Outdoor Temperature (°C DB)

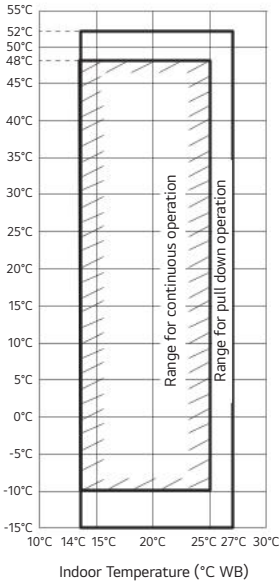

Heating

Outdoor Temperature (°C WB)

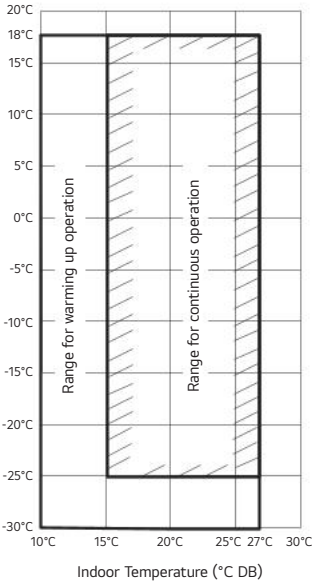


Note

1. These figures assume the following operating conditions
: Equivalent piping length is standard condition, and level differenc is 0m.
2. Range of pull down operation: If the relative humidity is too high, cooling capacity can be decreased by the sensible heat reduction.
3. Warming up operation means that the outdoor (outside) unit operates to reach the range of continuous operating, however it may not operate continuously due to safety or protection logic.

Simultaneous Cooling / Heating Operation


Cooling

Outdoor Temperature (°C DB)

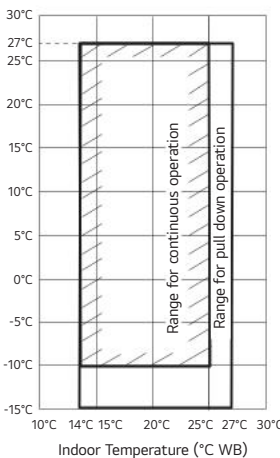

Heating

Outdoor Temperature (°C WB)

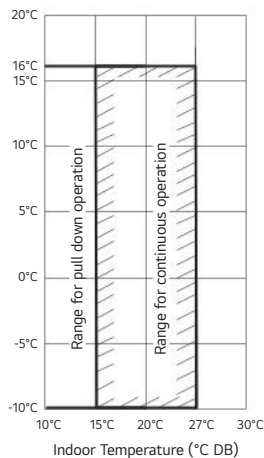


Note





1. These figures assume the following operating conditions
: Equivalent piping length is standard condition, and level differenc is 0m.
2. Range of pull down operation: If the relative humidity is too high, cooling capacity can be decreased by the sensible heat reduction.
3. Warming up operation means that the outdoor (outside) unit operates to reach the range of continuous operating, however it may not operate continuously due to safety or protection logic.

ARUM080LTE6 / ARUM100LTE6

ARUM120LTE6

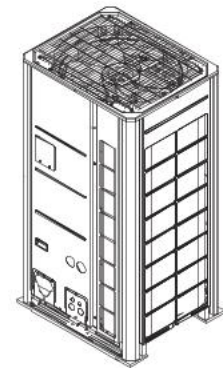


3D View

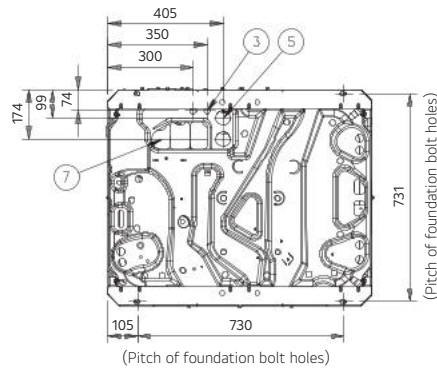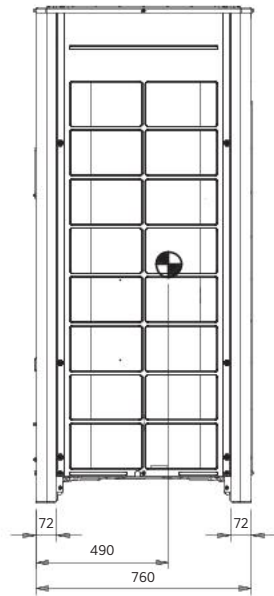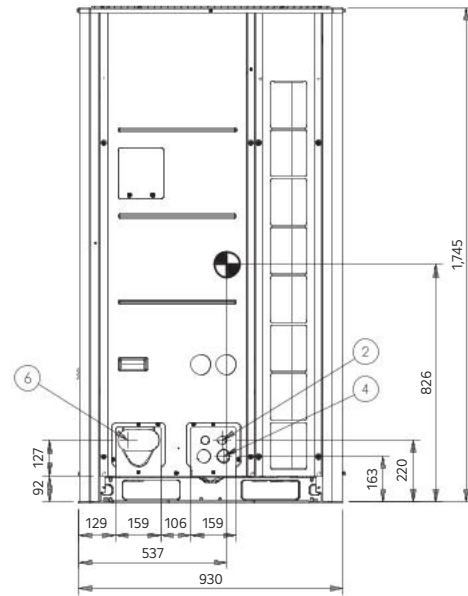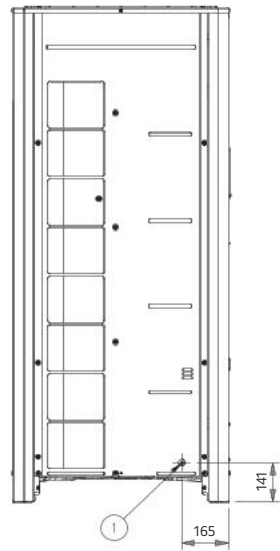

[Unit : mm]


No.	Part Name	Description
1	Leakage test hole (Side)	Ø22.2
2	Wire routing hole (Front)	2-Ø30
3	Wire routing hole (Bottom)	2-Ø22.2
4	Power cord routing hole (Front)	2-Ø45
5	Power cord routing hole (Bottom)	2-Ø50
6	Pipe routing hole (Front)	-
7	Pipe routing hole (Bottom)	-





Airguide fastening total 12 places
(Refer to the hole on the Airguide for the fastening position.)

ARUM140LTE6 / ARUM160LTE6
ARUM180LTE6 / ARUM200LTE6

[Unit : mm]		
No.	Part Name	Description
1	Leakage test hole (Side)	Ø22.2
2	Wire routing hole (Front)	2-Ø30
3	Wire routing hole (Bottom)	2-Ø22.2
4	Power cord routing hole (Front)	2-Ø45
5	Power cord routing hole (Bottom)	2-Ø50
6	Pipe routing hole (Front)	-
7	Pipe routing hole (Bottom)	-




3D View

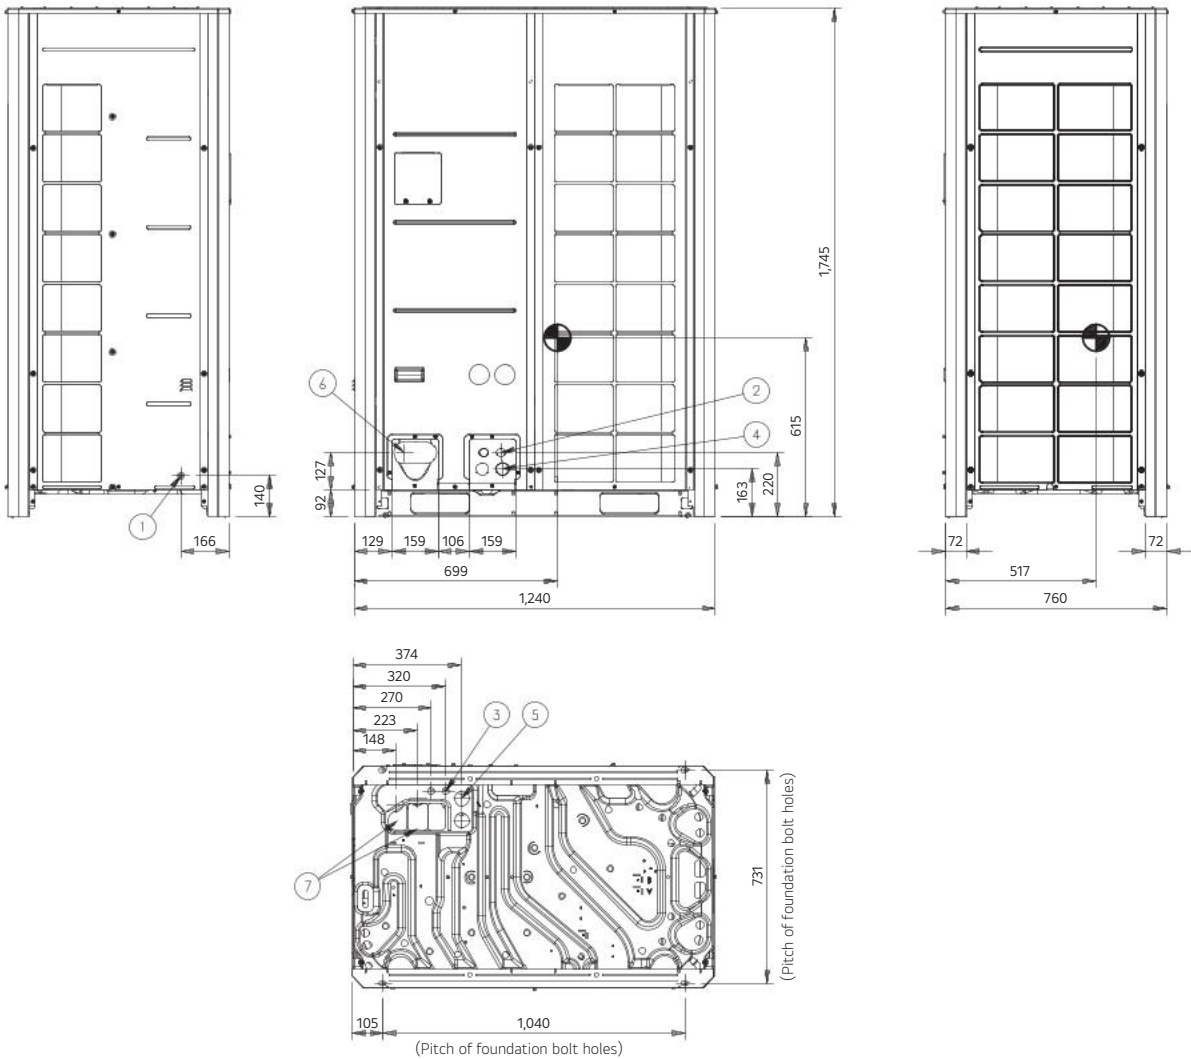
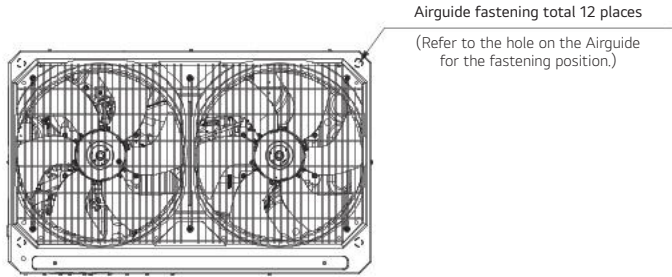


ARUM220LTE6 / ARUM240LTE6
ARUM260LTE6

[Unit : mm]		
No.	Part Name	Description
1	Pipe routing hole (Bottom)	-
2	Pipe routing hole (Front)	-
3	Power cord routing hole (Front)	2-Ø30
4	Wire routing hole (Front)	2-Ø45



3D View

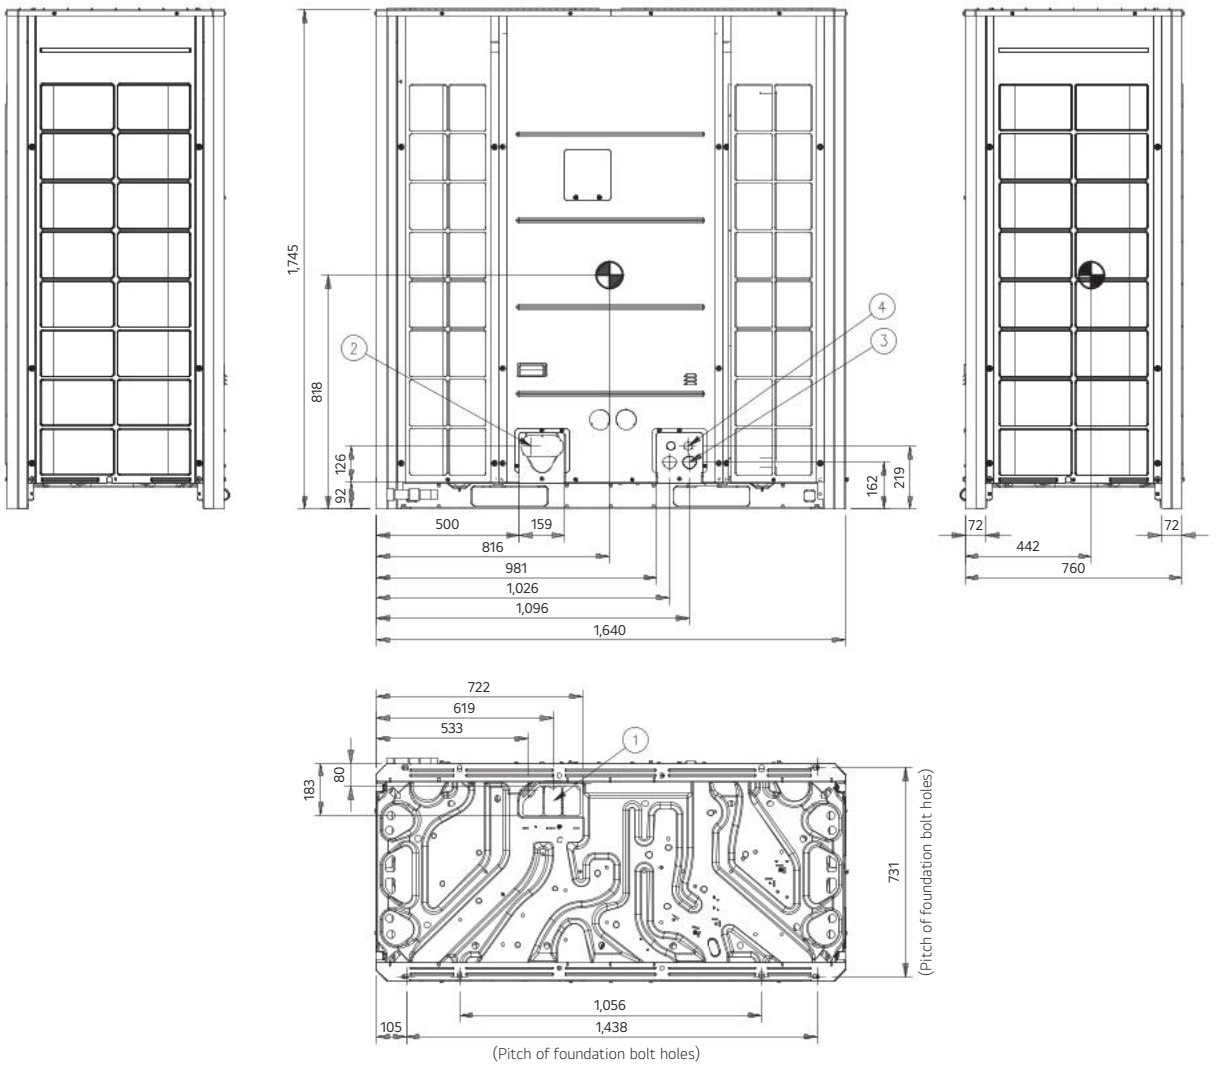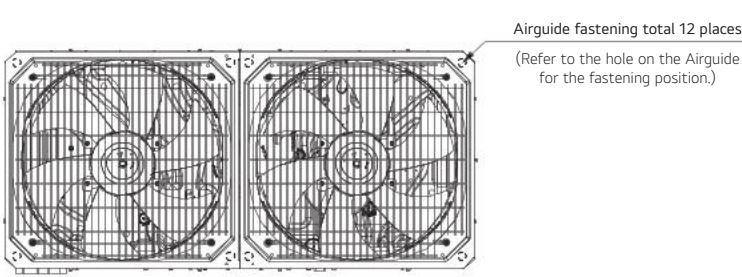

ARUM080LTE6 / ARUM100LTE6
ARUM120LTE6 / ARUM140LTE6



LG participates in the ECP programme for EUROVENT VRF program. Check ongoing validity of certification : www.eurovent-certification.com

HP			8	10	12	14
Classification	Chassis	-	UXA	UXA	UXA	UXB
	Combination Unit	-	ARUM080LTE6	ARUM100LTE6	ARUM120LTE6	ARUM140LTE6
Power Supply		V / Ø / Hz	380-415 / 3 / 50	380-415 / 3 / 50	380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW	22.4	28.0	33.6	39.2
Heating Capacity	Rated	kW	22.4	28.0	33.6	39.2
	Max	kW	25.2	31.5	37.8	44.1
Power Input (Cooling)	Rated	kW	6.10	8.33	11.67	11.88
Power Input (Heating)	Rated	kW	5.16	6.22	7.76	8.43
Efficiency	EER (Rated)	W/W	3.67	3.36	2.88	3.30
	COP (Rated)	W/W	4.34	4.50	4.33	4.65
	SEER	Wh/Wh	8.28	8.11	7.94	8.55
	SCOP	Wh/Wh	4.45	4.52	4.99	5.17
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	220 x 1	220 x 1	220 x 1	320 x 1
	Discharge direction (Side / Top)		Top	Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct	Direct
	Output	W x No.	1,200 x 1	1,200 x 1	1,200 x 1	900 x 2
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1	62.1	62.1	62.1
	Number of Revolution	rev./min	3,600	3,600	3,600	3,600
	Motor Output	W x No.	5,300 x 1	5,300 x 1	5,300 x 1	5,300 x 1
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	930 x 1,745 x 760	930 x 1,745 x 760	930 x 1,745 x 760	1,240 x 1,745 x 760
	Shipping (W x H x D)	mm	965 x 1,919 x 802	965 x 1,919 x 802	965 x 1,919 x 802	1,282 x 1,919 x 802
Weight	Net	kg	215	215	215	255
	Shipping	kg	225	225	225	265
Refrigerant	Type	-	R410A	R410A	R410A	R410A
	Precharged Amount	kg	8.5	9.5	9.5	13.0
	t-CO ₂ eq.	-	17.744	19.831	19.831	27.138
	Control Type	-	EEV	EEV	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.70 (1/2)	Ø12.70 (1/2)
	Gas	mm (inch)	Ø19.05 (3/4)	Ø22.20 (7/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø19.05 (3/4)	Ø22.20 (7/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø15.88 (5/8)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø22.20 (7/8)
Sound Pressure Level* (Outdoor Unit)	Cooling	dB (A)	57.0	57.5	59.0	60.0
	Heating	dB (A)	58.0	58.5	60.0	61.0
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	78.0	79.0	80.0	81.0
	Heating	dB (A)	78.0	79.0	82.0	81.0
Connecting Cable	Communication Cable (VCTF-SB)	mm² × cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	13 (20)	16 (25)	20 (30)	23 (35)

*: Sound Pressure is not a value declared on Eurovent Program.
1) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.

ARUM160LTE6 / ARUM180LTE6
ARUM200LTE6 / ARUM220LTE6



2) LG participates in the ECP programme for EUROVENT VRF program. Check ongoing validity of certification : www.eurovent-certification.com

HP			16	18	20	22
Classification	Chassis	-	UXB	UXB	UXB	UXC
	Combination Unit	-	ARUM160LTE6	ARUM180LTE6	ARUM200LTE6	ARUM220LTE6
Power Supply		V / Ø / Hz	380-415 / 3 / 50	380-415 / 3 / 50	380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW	44.8	50.4	56.0	61.6
Heating Capacity	Rated	kW	44.8	50.4	56.0	61.6
	Max	kW	50.4	56.7	63.0	69.3
Power Input (Cooling)	Rated	kW	15.45	14.40	17.55	22.00
Power Input (Heating)	Rated	kW	10.09	10.59	12.64	15.96
Efficiency	EER (Rated)	W/W	2.90	3.50	3.19	2.80
	COP (Rated)	W/W	4.44	4.76	4.43	3.86
	SEER	Wh/Wh	7.97	8.65	8.42	7.20
	SCOP	Wh/Wh	5.46	4.81	5.13	4.62
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	320 x 1	320 x 1	320 x 1	430 x 1
	Discharge direction (Side / Top)		Top	Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct	Direct
	Output	W x No.	900 x 2	900 x 2	900 x 2	1,500 x 2
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1	62.1 x 2	62.1 x 2	62.1 x 2
	Number of Revolution	rev./min	3,600	3,600 x 2	3,600 x 2	3,600 x 2
	Motor Output	W x No.	5,300 x 1	5,300 x 2	5,300 x 2	5,300 x 2
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	1,240 x 1,745 x 760	1,240 x 1,745 x 760	1,240 x 1,745 x 760	1,640 x 1,745 x 760
	Shipping (W x H x D)	mm	1,282 x 1,919 x 802	1,282 x 1,919 x 802	1,282 x 1,919 x 802	1,675 x 1,919 x 802
Weight	Net	kg	255	300	300	362
	Shipping	kg	265	310	310	372
Refrigerant	Type	-	R410A	R410A	R410A	R410A
	Precharged Amount	kg	13.0	16.0	16.0	16.0
	t-CO ₂ eq.	-	27.138	33.400	33.400	33.400
	Control Type	-	EEV	EEV	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø12.70 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Gas	mm (inch)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø22.20 (7/8)	Ø22.20 (7/8)	Ø22.20 (7/8)	Ø28.58 (1-1/8)
Sound Pressure Level* (Outdoor Unit)	Cooling	dB (A)	60.5	61.0	62.0	64.0
	Heating	dB (A)	61.5	62.0	63.5	66.0
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	85.0	85.0	86.0	84.0
	Heating	dB (A)	85.0	86.0	89.0	88.0
Connecting Cable	Communication Cable (VCTF-SB)	mm² × cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	26 (40)	29 (45)	32 (50)	35 (56)

*: Sound Pressure is not a value declared on Eurovent Program.
1) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.
2) Applying to 16, 18, 20HP outdoor units only.

ARUM240LTE6 / ARUM260LTE6
ARUM280LTE6 / ARUM300LTE6



HP			24	26	28	30
Classification	Chassis	-	UXC	UXC	UXB + UXA	UXB + UXA
	Combination Unit	-	ARUM240LTE6	ARUM260LTE6	ARUM160LTE6 ARUM120LTE6	ARUM180LTE6 ARUM120LTE6
Power Supply		V / Ø / Hz	380-415 / 3 / 50	380-415 / 3 / 50	380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW	67.2	72.8	78.4	84.0
Heating Capacity	Rated	kW	67.2	72.8	78.4	84.0
	Max	kW	75.6	81.9	88.2	94.5
Power Input (Cooling)	Rated	kW	26.15	31.52	27.10	26.04
Power Input (Heating)	Rated	kW	18.61	21.60	17.86	18.36
Efficiency	EER (Rated)	W/W	2.57	2.31	2.89	3.23
	COP (Rated)	W/W	3.61	3.37	4.39	4.58
	SEER	Wh/Wh	6.91	6.62	7.96	8.30
	SCOP	Wh/Wh	4.31	4.11	5.22	4.90
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	430 x 1	430 x 1	(320 x 1) + (220 x 1)	(320 x 1) + (220 x 1)
	Discharge direction (Side / Top)		Top	Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct	Direct
	Output	W x No.	1,500 x 2	1,500 x 2	(900 x 2) + (1,200 x 1)	(900 x 2) + (1,200 x 1)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1 x 2	62.1 x 2	62.1 x 2	62.1 x 3
	Number of Revolution	rev./min	3,600 x 2	3,600 x 2	3,600 x 2	3,600 x 3
	Motor Output	W x No.	5,300 x 2	5,300 x 2	5,300 x 2	5,300 x 3
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	1,640 x 1,745 x 760	1,640 x 1,745 x 760	((1,240 x 1,745 x 760) x 1) + ((930 x 1,745 x 760) x 1)	((1,240 x 1,745 x 760) x 1) + ((930 x 1,745 x 760) x 1)
	Shipping (W x H x D)	mm	1,675 x 1,919 x 787	1,675 x 1,919 x 787	((1,282 x 1,919 x 802) x 1) + ((965 x 1,919 x 802) x 1)	((1,282 x 1,919 x 802) x 1) + ((965 x 1,919 x 802) x 1)
Weight	Net	kg	362	362	(255 x 1) + (215 x 1)	(300 x 1) + (215 x 1)
	Shipping	kg	372	372	(265 x 1) + (225 x 1)	(310 x 1) + (225 x 1)
Refrigerant	Type	-	R410A	R410A	R410A	R410A
	Precharged Amount	kg	16.0	16.0	22.5	25.5
	t-CO ₂ eq.	-	33.400	33.400	46.969	53.231
	Control Type	-	EEV	EEV	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø15.88 (5/8)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Gas	mm (inch)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
Sound Pressure Level (Outdoor Unit)	Cooling	dB (A)	65.0	65.0	62.8	63.1
	Heating	dB (A)	66.0	66.5	63.8	64.1
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	85.0	89.0	86.2	86.2
	Heating	dB (A)	88.0	89.0	86.8	87.5
Connecting Cable	Communication Cable (VCTF-SB)	mm² × cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	39 (61)	42 (64)	45 (56)	49 (60)

1) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.

ARUM320LTE6 / ARUM340LTE6
ARUM360LTE6 / ARUM380LTE6



HP			32	34	36	38
Classification	Chassis	-	UXB + UXA	UXB + UXB	UXB + UXB	UXB + UXB
	Combination Unit	-	ARUM200LTE6 ARUM120LTE6	ARUM200LTE6 ARUM140LTE6	ARUM200LTE6 ARUM160LTE6	ARUM200LTE6 ARUM180LTE6
Power Supply		V / Ø / Hz	380-415 / 3 / 50	380-415 / 3 / 50	380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW	89.6	95.2	100.8	106.4
Heating Capacity	Rated	kW	89.6	95.2	100.8	106.4
	Max	kW	100.8	107.1	113.4	119.7
Power Input (Cooling)	Rated	kW	29.19	29.42	32.99	31.93
Power Input (Heating)	Rated	kW	20.41	21.07	22.73	23.23
Efficiency	EER (Rated)	W/W	3.07	3.24	3.06	3.33
	COP (Rated)	W/W	4.39	4.52	4.43	4.58
	SEER	Wh/Wh	8.18	8.48	8.19	8.53
	SCOP	Wh/Wh	5.06	5.15	5.29	4.97
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	(320 x 1) + (220 x 1)	(320 x 1) + (320 x 1)	(320 x 1) + (320 x 1)	(320 x 1) + (320 x 1)
	Discharge direction (Side / Top)		Top	Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct	Direct
	Output	W x No.	(900 x 2) + (1,200 x 1)	(900 x 2) + (900 x 2)	(900 x 2) + (900 x 2)	(900 x 2) + (900 x 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1 x 3	62.1 x 3	62.1 x 3	62.1 x 4
	Number of Revolution	rev./min	3,600 x 3	3,600 x 3	3,600 x 3	3,600 x 4
	Motor Output	W x No.	5,300 x 3	5,300 x 3	5,300 x 3	5,300 x 4
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	((1,240 x 1,745 x 760) x 1) + ((930 x 1,745 x 760) x 1)	(1,240 x 1,745 x 760) x 2	(1,240 x 1,745 x 760) x 2	(1,240 x 1,745 x 760) x 2
	Shipping (W x H x D)	mm	((1,282 x 1,919 x 802) x 1) + ((965 x 1,919 x 802) x 1)	(1,282 x 1,919 x 802) x 2	(1,282 x 1,919 x 802) x 2	(1,282 x 1,919 x 802) x 2
Weight	Net	kg	(300 x 1) + (215 x 1)	(300 x 1) + (255 x 1)	(300 x 1) + (255 x 1)	(300 x 1) + (300 x 1)
	Shipping	kg	(310 x 1) + (225 x 1)	(310 x 1) + (265 x 1)	(310 x 1) + (265 x 1)	(310 x 1) + (310 x 1)
Refrigerant	Type	-	R410A	R410A	R410A	R410A
	Precharged Amount	kg	25.5	29.0	29.0	32.0
	t-CO ₂ eq.	-	53.231	60.538	60.538	66.800
	Control Type	-	EEV	EEV	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Gas	mm (inch)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø34.90 (1-3/8)
Sound Pressure Level (Outdoor Unit)	Cooling	dB (A)	63.8	64.1	64.3	64.5
	Heating	dB (A)	65.1	65.4	65.6	65.8
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	87.0	87.2	88.5	88.5
	Heating	dB (A)	89.8	89.6	90.5	90.8
Connecting Cable	Communication Cable (VCTF-SB)	mm² × cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	52 (64)	55 (64)	58 (64)	61 (64)

1) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.

ARUM400LTE6 / ARUM420LTE6
ARUM440LTE6



HP			40	42	44
Classification	Chassis	-	UXB + UXB	UXC + UXB	UXC + UXB
	Combination Unit	-	ARUM200LTE6 ARUM200LTE6	ARUM220LTE6 ARUM200LTE6	ARUM240LTE6 ARUM200LTE6
Power Supply		V / Ø / Hz	380-415 / 3 / 50	380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW	112.0	117.6	123.2
Heating Capacity	Rated	kW	112.0	117.6	123.2
	Max	kW	126.0	132.3	138.6
Power Input (Cooling)	Rated	kW	35.08	39.54	43.69
Power Input (Heating)	Rated	kW	25.28	28.60	31.25
Efficiency	EER (Rated)	W/W	3.19	2.97	2.82
	COP (Rated)	W/W	4.43	4.11	3.94
	SEER	Wh/Wh	8.42	7.81	7.66
	SCOP	Wh/Wh	5.13	4.87	4.72
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	(320 x 1) + (320 x 1)	(430 x 1) + (320 x 1)	(430 x 1) + (320 x 1)
	Discharge direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
	Output	W x No.	(900 x 2) + (900 x 2)	(1,500 x 2) + (900 x 2)	(1,500 x 2) + (900 x 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1 x 4	62.1 x 4	62.1 x 4
	Number of Revolution	rev./min	3,600 x 4	3,600 x 4	3,600 x 4
	Motor Output	W x No.	5,300 x 4	5,300 x 4	5,300 x 4
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	(1,240 x 1,745 x 760) x 2	((1,640 x 1,745 x 760) x 1) + ((1,240 x 1,745 x 760) x 1)	((1,640 x 1,745 x 760) x 1) + ((1,240 x 1,745 x 760) x 1)
	Shipping (W x H x D)	mm	(1,282 x 1,919 x 802) x 2	((1,675 x 1,919 x 802) x 1) + ((1,282 x 1,919 x 802) x 1)	((1,675 x 1,919 x 802) x 1) + ((1,282 x 1,919 x 802) x 1)
Weight	Net	kg	(300 x 1) + (300 x 1)	(362 x 1) + (300 x 1)	(372 x 1) + (310 x 1)
	Shipping	kg	(310 x 1) + (310 x 1)	(372 x 1) + (310 x 1)	(372 x 1) + (310 x 1)
Refrigerant	Type	-	R410A	R410A	R410A
	Precharged Amount	kg	32.0	32.0	32.0
	t-CO ₂ eq.	-	66.800	66.800	66.800
	Control Type	-	EEV	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Gas	mm (inch)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)
Sound Pressure Level (Outdoor Unit)	Cooling	dB (A)	65.0	66.1	66.8
	Heating	dB (A)	66.5	67.9	67.9
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	89.0	88.1	88.5
	Heating	dB (A)	92.0	91.5	91.5
Connecting Cable (VCTF-SB)		mm² × cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64	64

1) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.

ARUM460LTE6 / ARUM480LTE6
ARUM500LTE6



HP			46	48	50
Classification	Chassis	-	UXC + UXC	UXC + UXC	UXB + UXB + UXA
	Combination Unit	-	ARUM240LTE6 ARUM220LTE6	ARUM240LTE6 ARUM240LTE6	ARUM200LTE6 ARUM180LTE6 ARUM120LTE6
Power Supply		V / Ø / Hz	380-415 / 3 / 50	380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW	128.8	134.4	140.0
Heating Capacity	Rated	kW	128.8	134.4	140.0
	Max	kW	144.9	151.2	157.5
Power Input (Cooling)	Rated	kW	48.15	52.30	43.58
Power Input (Heating)	Rated	kW	34.57	37.22	31.00
Efficiency	EER (Rated)	W/W	2.67	2.57	3.21
	COP (Rated)	W/W	3.73	3.61	4.52
	SEER	Wh/Wh	7.06	6.91	8.34
	SCOP	Wh/Wh	4.47	4.31	4.97
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	(430 x 1) + (430 x 1)	(430 x 1) + (430 x 1)	(320 x 1) + (320 x 1) + (220 x 1)
	Discharge direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
	Output	W x No.	(1,500 x 2) + (1,500 x 2)	(1,500 x 2) + (1,500 x 2)	(900 x 2) + (900 x 2) + (1,200 x 1)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1 x 4	62.1 x 4	62.1 x 5
	Number of Revolution	rev./min	3,600 x 4	3,600 x 4	3,600 x 5
	Motor Output	W x No.	5,300 x 4	5,300 x 4	5,300 x 5
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	(1,640 x 1,745 x 760) x 2	(1,640 x 1,745 x 760) x 2	((1,240 x 1,745 x 760) x 2) + ((930 x 1,745 x 760) x 1)
	Shipping (W x H x D)	mm	(1,675 x 1,919 x 802) x 2	(1,675 x 1,919 x 802) x 2	((1,282 x 1,919 x 802) x 2) + ((965 x 1,919 x 802) x 1)
Weight	Net	kg	(362 x 1) + (362 x 1)	(362 x 1) + (362 x 1)	(300 x 1) + (300 x 1) + (215 x 1)
	Shipping	kg	(372 x 1) + (372 x 1)	(372 x 1) + (372 x 1)	(310 x 1) + (310 x 1) + (225 x 1)
Refrigerant	Type	-	R410A	R410A	R410A
	Precharged Amount	kg	32.0	32.0	41.5
	t-CO ₂ eq.	-	66.800	66.800	86.631
	Control Type	-	EEV	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Gas	mm (inch)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)
Sound Pressure Level (Outdoor Unit)	Cooling	dB (A)	67.5	68.0	65.6
	Heating	dB (A)	69.0	69.0	66.8
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	87.5	88.0	89.1
	Heating	dB (A)	91.0	91.0	91.3
Connecting Cable (VCTF-SB)		mm² × cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64	64

1) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.

ARUM520LTE6 / ARUM540LTE6
ARUM560LTE6



HP			52	54	56
Classification	Chassis	-	UXB + UXB + UXA	UXB + UXB + UXB	UXB + UXB + UXB
	Combination Unit	-	ARUM200LTE6 ARUM200LTE6 ARUM120LTE6	ARUM200LTE6 ARUM200LTE6 ARUM140LTE6	ARUM200LTE6 ARUM200LTE6 ARUM160LTE6
Power Supply		V / Ø / Hz	380-415 / 3 / 50	380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW	145.6	151.2	156.8
Heating Capacity	Rated	kW	145.6	151.2	156.8
	Max	kW	163.8	170.1	176.4
Power Input (Cooling)	Rated	kW	46.73	46.96	50.53
Power Input (Heating)	Rated	kW	33.05	33.71	35.37
Efficiency	EER (Rated)	W/W	3.12	3.22	3.10
	COP (Rated)	W/W	4.41	4.49	4.43
	SEER	Wh/Wh	8.26	8.46	8.27
	SCOP	Wh/Wh	5.08	5.14	5.24
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	(320 x 1) + (320 x 1) + (220 x 1)	(320 x 1) + (320 x 1) + (320 x 1)	(320 x 1) + (320 x 1) + (320 x 1)
	Discharge direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
	Output	W x No.	(900 x 2) + (900 x 2) + (1,200 x 1)	(900 x 2) + (900 x 2) + (900 x 2)	(900 x 2) + (900 x 2) + (900 x 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1 x 5	62.1 x 5	62.1 x 5
	Number of Revolution	rev./min	3,600 x 5	3,600 x 5	3,600 x 5
	Motor Output	W x No.	5,300 x 5	5,300 x 5	5,300 x 5
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	((1,240 x 1,745 x 760) x 2) + ((930 x 1,745 x 760) x 1)	(1,240 x 1,745 x 760) x 3	(1,240 x 1,745 x 760) x 3
	Shipping (W x H x D)	mm	((1,282 x 1,919 x 802) x 2) + ((965 x 1,919 x 802) x 1)	(1,282 x 1,919 x 802) x 3	(1,282 x 1,919 x 802) x 3
Weight	Net	kg	(300 x 1) + (300 x 1) + (215 x 1)	(300 x 1) + (300 x 1) + (255 x 1)	(300 x 1) + (300 x 1) + (255 x 1)
	Shipping	kg	(310 x 1) + (310 x 1) + (225 x 1)	(310 x 1) + (310 x 1) + (265 x 1)	(310 x 1) + (310 x 1) + (265 x 1)
Refrigerant	Type	-	R410A	R410A	R410A
	Precharged Amount	kg	41.5	45.0	45.0
	t-CO ₂ eq.	-	86.631	93.938	93.938
	Control Type	-	EEV	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Gas	mm (inch)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)
Sound Pressure Level (Outdoor Unit)	Cooling	dB (A)	66.0	66.2	66.3
	Heating	dB (A)	67.4	67.6	67.7
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	89.5	89.6	90.5
	Heating	dB (A)	92.4	92.3	92.8
Connecting Cable	Communication Cable (VCTF-SB)	mm² x cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64	64

1) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.

ARUM580LTE6 / ARUM600LTE6
ARUM620LTE6



HP			58	60	62
Classification	Chassis	-	UXB + UXB + UXB	UXB + UXB + UXB	UXC + UXB + UXB
	Combination Unit	-	ARUM200LTE6 ARUM200LTE6 ARUM180LTE6	ARUM200LTE6 ARUM200LTE6 ARUM200LTE6	ARUM220LTE6 ARUM200LTE6 ARUM200LTE6
Power Supply		V / Ø / Hz	380-415 / 3 / 50	380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW	162.4	168.0	173.6
Heating Capacity	Rated	kW	162.4	168.0	173.6
	Max	kW	182.7	189.0	195.3
Power Input (Cooling)	Rated	kW	49.47	52.62	57.08
Power Input (Heating)	Rated	kW	35.87	37.92	41.24
Efficiency	EER (Rated)	W/W	3.28	3.19	3.04
	COP (Rated)	W/W	4.53	4.43	4.21
	SEER	Wh/Wh	8.49	8.42	8.01
	SCOP	Wh/Wh	5.02	5.13	4.96
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	(320 x 1) + (320 x 1) + (320 x 1)	(320 x 1) + (320 x 1) + (320 x 1)	(430 x 1) + (320 x 1) + (320 x 1)
	Discharge direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
	Output	W x No.	(900 x 2) + (900 x 2) + (900 x 2)	(900 x 2) + (900 x 2) + (900 x 2)	(1,500 x 2) + (900 x 2) + (900 x 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1 x 6	62.1 x 6	62.1 x 6
	Number of Revolution	rev./min	3,600 x 6	3,600 x 6	3,600 x 6
	Motor Output	W x No.	5,300 x 6	5,300 x 6	5,300 x 6
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	(1,240 x 1,745 x 760) x 3	(1,240 x 1,745 x 760) x 3	((1,640 x 1,745 x 760) x 1) + ((1,240 x 1,745 x 760) x 2)
	Shipping (W x H x D)	mm	(1,282 x 1,919 x 802) x 3	(1,282 x 1,919 x 802) x 3	((1,675 x 1,919 x 802) x 1) + ((1,282 x 1,919 x 802) x 2)
Weight	Net	kg	(300 x 1) + (300 x 1) + (300 x 1)	(300 x 1) + (300 x 1) + (300 x 1)	(362 x 1) + (300 x 1) + (300 x 1)
	Shipping	kg	(310 x 1) + (310 x 1) + (310 x 1)	(310 x 1) + (310 x 1) + (310 x 1)	(372 x 1) + (310 x 1) + (310 x 1)
Refrigerant	Type	-	R410A	R410A	R410A
	Precharged Amount	kg	48.0	48.0	48.0
	t-CO ₂ eq.	-	100.200	100.200	100.200
	Control Type	-	EEV	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø22.20 (7/8)
	Gas	mm (inch)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)	Ø34.90 (1-3/8)
Sound Pressure Level (Outdoor Unit)	Cooling	dB (A)	66.5	66.8	67.5
	Heating	dB (A)	67.8	68.3	69.3
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	90.5	90.8	90.2
	Heating	dB (A)	93.0	93.8	93.5
Connecting Cable	Communication Cable (VCTF-SB)	mm² x cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64	64

1) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.

ARUM640LTE6 / ARUM660LTE6
ARUM680LTE6



HP			64	66	68
Classification	Chassis	-	UXC + UXB + UXB	UXC + UXC + UXB	UXC + UXC + UXB
	Combination Unit	-	ARUM240LTE6 ARUM200LTE6 ARUM200LTE6	ARUM240LTE6 ARUM220LTE6 ARUM200LTE6	ARUM240LTE6 ARUM240LTE6 ARUM200LTE6
Power Supply		V / Ø / Hz	380-415 / 3 / 50	380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW	179.2	184.8	190.4
Heating Capacity	Rated	kW	179.2	184.8	190.4
	Max	kW	201.6	207.9	214.2
Power Input (Cooling)	Rated	kW	61.23	65.69	69.84
Power Input (Heating)	Rated	kW	43.89	47.21	49.86
Efficiency	EER (Rated)	W/W	2.93	2.81	2.73
	COP (Rated)	W/W	4.08	3.91	3.82
	SEER	Wh/Wh	7.91	7.51	7.41
	SCOP	Wh/Wh	4.86	4.69	4.58
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	(430 x 1) + (320 x 1) + (320 x 1)	(430 x 1) + (430 x 1) + (320 x 1)	(430 x 1) + (430 x 1) + (320 x 1)
	Discharge direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
	Output	W x No.	(1,500 x 2) + (900 x 2) + (900 x 2)	(1,500 x 2) + (1,500 x 2) + (900 x 2)	(1,500 x 2) + (1,500 x 2) + (900 x 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1 x 6	62.1 x 6	62.1 x 6
	Number of Revolution	rev./min	3,600 x 6	3,600 x 6	3,600 x 6
	Motor Output	W x No.	5,300 x 6	5,300 x 6	5,300 x 6
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	((1,640 x 1,745 x 760) x 1) + ((1,240 x 1,745 x 760) x 2)	((1,640 x 1,745 x 760) x 2) + ((1,240 x 1,745 x 760) x 1)	((1,640 x 1,745 x 760) x 2) + ((1,240 x 1,745 x 760) x 1)
	Shipping (W x H x D)	mm	((1,675 x 1,919 x 802) x 1) + ((1,282 x 1,919 x 802) x 2)	((1,675 x 1,919 x 802) x 2) + ((1,282 x 1,919 x 802) x 1)	((1,675 x 1,919 x 802) x 2) + ((1,282 x 1,919 x 802) x 1)
Weight	Net	kg	(362 x 1) + (300 x 1) + (300 x 1)	(362 x 1) + (362 x 1) + (300 x 1)	(362 x 1) + (362 x 1) + (300 x 1)
	Shipping	kg	(372 x 1) + (310 x 1) + (310 x 1)	(372 x 1) + (372 x 1) + (310 x 1)	(372 x 1) + (372 x 1) + (310 x 1)
Refrigerant	Type	-	R410A	R410A	R410A
	Precharged Amount	kg	48.0	48.0	48.0
	t-CO ₂ eq.	-	100.200	100.200	100.200
	Control Type	-	EEV	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø22.20 (7/8)	Ø22.20 (7/8)	Ø22.20 (7/8)
	Gas	mm (inch)	Ø41.30 (1-5/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø41.30 (1-5/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø34.90 (1-3/8)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
Sound Pressure Level (Outdoor Unit)	Cooling	dB (A)	68.0	68.6	69.0
	Heating	dB (A)	69.3	70.1	70.1
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	90.5	89.8	90.1
	Heating	dB (A)	93.5	93.1	93.1
Connecting Cable	Communication Cable (VCTF-SB)	mm² × cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64	64

1) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.

ARUM700LTE6 / ARUM720LTE6
ARUM740LTE6



HP			70	72	74
Classification	Chassis	-	UXB + UXB + UXB + UXA	UXB + UXB + UXB + UXA	UXB + UXB + UXB + UXB
	Combination Unit	-	ARUM200LTE6 ARUM200LTE6 ARUM180LTE6 ARUM120LTE6	ARUM200LTE6 ARUM200LTE6 ARUM200LTE6 ARUM120LTE6	ARUM200LTE6 ARUM200LTE6 ARUM200LTE6 ARUM140LTE6
Power Supply		V / Ø / Hz	380-415 / 3 / 50	380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW	196.0	201.6	207.2
Heating Capacity	Rated	kW	196.0	201.6	207.2
	Max	kW	220.5	226.8	233.1
Power Input (Cooling)	Rated	kW	61.12	64.27	64.50
Power Input (Heating)	Rated	kW	43.64	45.69	46.35
Efficiency	EER (Rated)	W/W	3.21	3.14	3.21
	COP (Rated)	W/W	4.49	4.41	4.47
	SEER	Wh/Wh	8.36	8.30	8.45
	SCOP	Wh/Wh	5.01	5.09	5.14
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	(320 x 1) + (320 x 1) + (320 x 1) + (220 x 1)	(320 x 1) + (320 x 1) + (320 x 1) + (220 x 1)	(320 x 1) + (320 x 1) + (320 x 1) + (320 x 1)
	Discharge direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
	Output	W x No.	(900 x 2) + (900 x 2) + (900 x 2) + (1,200 x 1)	(900 x 2) + (900 x 2) + (900 x 2) + (1,200 x 1)	(900 x 2) + (900 x 2) + (900 x 2) + (900 x 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1 x 7	62.1 x 7	62.1 x 7
	Number of Revolution	rev./min	3,600 x 7	3,600 x 7	3,600 x 7
	Motor Output	W x No.	5,300 x 7	5,300 x 7	5,300 x 7
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	((1,240 x 1,745 x 760) x 3) + ((930 x 1,745 x 760) x 1)	((1,240 x 1,745 x 760) x 3) + ((930 x 1,745 x 760) x 1)	(1,240 x 1,745 x 760) x 4
	Shipping (W x H x D)	mm	((1,282 x 1,919 x 802) x 3) + ((965 x 1,919 x 802) x 1)	((1,282 x 1,919 x 802) x 3) + ((965 x 1,919 x 802) x 1)	(1,282 x 1,919 x 802) x 4
Weight	Net	kg	(300 x 1) + (300 x 1) + (300 x 1) + (215 x 1)	(300 x 1) + (300 x 1) + (300 x 1) + (215 x 1)	(300 x 1) + (300 x 1) + (300 x 1) + (255 x 1)
	Shipping	kg	(310 x 1) + (310 x 1) + (310 x 1) + (225 x 1)	(310 x 1) + (310 x 1) + (310 x 1) + (225 x 1)	(310 x 1) + (310 x 1) + (310 x 1) + (265 x 1)
Refrigerant	Type	-	R410A	R410A	R410A
	Precharged Amount	kg	57.5	57.5	61.0
	t-CO ₂ eq.	-	120.031	120.031	127.338
	Control Type	-	EEV	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø22.20 (7/8)	Ø22.20 (7/8)	Ø22.20 (7/8)
	Gas	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
Sound Pressure Level (Outdoor Unit)	Cooling	dB (A)	67.2	67.4	67.6
	Heating	dB (A)	68.5	68.9	69.0
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	90.8	91.1	91.2
	Heating	dB (A)	93.3	94.1	94.0
Connecting Cable	Communication Cable (VCTF-SB)	mm² × cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64	64

1) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.

ARUM760LTE6 / ARUM780LTE6
ARUM800LTE6



HP			76	78	80
Classification	Chassis	-	UXB + UXB + UXB + UXB	UXB + UXB + UXB + UXB	UXB + UXB + UXB + UXB
	Combination Unit	-	ARUM200LTE6	ARUM200LTE6	ARUM200LTE6
			ARUM200LTE6	ARUM200LTE6	ARUM200LTE6
			ARUM200LTE6	ARUM200LTE6	ARUM200LTE6
			ARUM160LTE6	ARUM180LTE6	ARUM200LTE6
Power Supply		V / Ø / Hz	380-415 / 3 / 50	380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW	212.8	218.4	224.0
Heating Capacity	Rated	kW	212.8	218.4	224.0
	Max	kW	239.4	245.7	252.0
Power Input (Cooling)	Rated	kW	68.07	67.01	70.16
Power Input (Heating)	Rated	kW	48.01	48.51	50.56
Efficiency	EER (Rated)	W/W	3.13	3.26	3.19
	COP (Rated)	W/W	4.43	4.50	4.43
	SEER	Wh/Wh	8.30	8.47	8.42
	SCOP	Wh/Wh	5.21	5.05	5.13
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	(320 x 1) + (320 x 1) + (320 x 1) + (320 x 1)	(320 x 1) + (320 x 1) + (320 x 1) + (320 x 1)	(320 x 1) + (320 x 1) + (320 x 1) + (320 x 1)
	Discharge direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
	Output	W x No.	(900 x 2) + (900 x 2) + (900 x 2) + (900 x 2)	(900 x 2) + (900 x 2) + (900 x 2) + (900 x 2)	(900 x 2) + (900 x 2) + (900 x 2) + (900 x 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1 x 7	62.1 x 8	62.1 x 8
	Number of Revolution	rev./min	3,600 x 7	3,600 x 8	3,600 x 8
	Motor Output	W x No.	5,300 x 7	5,300 x 8	5,300 x 8
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	(1,240 x 1,745 x 760) x 4	(1,240 x 1,745 x 760) x 4	(1,240 x 1,745 x 760) x 4
	Shipping (W x H x D)	mm	(1,282 x 1,919 x 802) x 4	(1,282 x 1,919 x 802) x 4	(1,282 x 1,919 x 802) x 4
Weight	Net	kg	(300 x 1) + (300 x 1) + (300 x 1) + (255 x 1)	(300 x 1) + (300 x 1) + (300 x 1) + (300 x 1)	(300 x 1) + (300 x 1) + (300 x 1) + (300 x 1)
	Shipping	kg	(310 x 1) + (310 x 1) + (310 x 1) + (265 x 1)	(310 x 1) + (310 x 1) + (310 x 1) + (310 x 1)	(310 x 1) + (310 x 1) + (310 x 1) + (310 x 1)
Refrigerant	Type	-	R410A	R410A	R410A
	Precharged Amount	kg	61.0	64.0	64.0
	t-CO ₂ eq.	-	127.338	133.600	133.600
	Control Type	-	EEV	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø22.20 (7/8)	Ø22.20 (7/8)	Ø22.20 (7/8)
	Gas	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
Sound Pressure Level (Outdoor Unit)	Cooling	dB (A)	67.7	67.8	68.0
	Heating	dB (A)	69.1	69.2	69.5
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	91.8	91.8	92.0
	Heating	dB (A)	94.3	94.4	95.0
Connecting Cable	Communication Cable (VCTF-SB)	mm² × cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64	64

1) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.

ARUM820LTE6 / ARUM840LTE6



HP			82	84
Classification	Chassis	-	UXC + UXC + UXB + UXB	UXC + UXC + UXB + UXB
	Combination Unit	-	ARUM240LTE6	ARUM240LTE6
			ARUM240LTE6	ARUM240LTE6
			ARUM200LTE6 ARUM140LTE6	ARUM200LTE6 ARUM160LTE6
Power Supply		V / Ø / Hz	380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW	229.6	235.2
Heating Capacity	Rated	kW	229.6	235.2
	Max	kW	258.3	264.6
Power Input (Cooling)	Rated	kW	81.72	85.29
Power Input (Heating)	Rated	kW	58.29	59.95
Efficiency	EER (Rated)	W/W	2.81	2.76
	COP (Rated)	W/W	3.94	3.92
	SEER	Wh/Wh	7.70	7.55
	SCOP	Wh/Wh	4.73	4.80
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	(430 x 1) + (430 x 1) + (320 x 1) + (320 x 1)	(430 x 1) + (430 x 1) + (320 x 1) + (320 x 1)
	Discharge direction (Side / Top)		Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct
	Output	W x No.	(1,500 x 2) + (1,500 x 2) + (900 x 2) + (900 x 2)	(1,500 x 2) + (1,500 x 2) + (900 x 2) + (900 x 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1 x 7	62.1 x 7
	Number of Revolution	rev./min	3,600 x 7	3,600 x 7
	Motor Output	W x No.	5,300 x 7	5,300 x 7
	Oil Type	-	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	((1,640 x 1,745 x 760) x 2) + ((1,240 x 1,745 x 760) x 2)	((1,640 x 1,745 x 760) x 2) + ((1,240 x 1,745 x 760) x 2)
	Shipping (W x H x D)	mm	((1,675 x 1,919 x 802) x 2) + ((1,282 x 1,919 x 802) x 2)	((1,675 x 1,919 x 802) x 2) + ((1,282 x 1,919 x 802) x 2)
Weight	Net	kg	(362 x 1) + (362 x 1) + (300 x 1) + (255 x 1)	(362 x 1) + (362 x 1) + (300 x 1) + (255 x 1)
	Shipping	kg	(372 x 1) + (372 x 1) + (310 x 1) + (265 x 1)	(372 x 1) + (372 x 1) + (310 x 1) + (265 x 1)
Refrigerant	Type	-	R410A	R410A
	Precharged Amount	kg	61.0	61.0
	t-CO ₂ eq.	-	127.338	127.338
	Control Type	-	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø22.20 (7/8)	Ø22.20 (7/8)
	Gas	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
Sound Pressure Level (Outdoor Unit)	Cooling	dB (A)	69.5	69.6
	Heating	dB (A)	70.6	70.6
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	90.6	91.3
	Heating	dB (A)	93.4	93.8
Connecting Cable	Communication Cable (VCTF-SB)	mm² × cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64

1) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.

ARUM860LTE6 / ARUM880LTE6



HP			86	88
Classification	Chassis	-	UXC + UXC + UXB + UXB	UXC + UXC + UXB + UXB
	Combination Unit	-	ARUM240LTE6	ARUM240LTE6
			ARUM240LTE6	ARUM240LTE6
			ARUM200LTE6	ARUM200LTE6
			ARUM180LTE6	ARUM200LTE6
Power Supply		V / Ø / Hz	380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW	240.8	246.4
Heating Capacity	Rated	kW	240.8	246.4
	Max	kW	270.9	277.2
Power Input (Cooling)	Rated	kW	84.23	87.38
Power Input (Heating)	Rated	kW	60.45	62.50
Efficiency	EER (Rated)	W/W	2.86	2.82
	COP (Rated)	W/W	3.98	3.94
	SEER	Wh/Wh	7.72	7.66
	SCOP	Wh/Wh	4.64	4.72
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	(430 x 1) + (430 x 1) + (320 x 1) + (320 x 1)	(430 x 1) + (430 x 1) + (320 x 1) + (320 x 1)
	Discharge direction (Side / Top)		Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct
	Output	W x No.	(1,500 x 2) + (1,500 x 2) + (900 x 2) + (900 x 2)	(1,500 x 2) + (1,500 x 2) + (900 x 2) + (900 x 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1 x 8	62.1 x 8
	Number of Revolution	rev./min	3,600 x 8	3,600 x 8
	Motor Output	W x No.	5,300 x 8	5,300 x 8
	Oil Type	-	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	((1,640 x 1,745 x 760) x 2) + ((1,240 x 1,745 x 760) x 2)	((1,640 x 1,745 x 760) x 2) + ((1,240 x 1,745 x 760) x 2)
	Shipping (W x H x D)	mm	((1,675 x 1,919 x 802) x 2) + ((1,282 x 1,919 x 802) x 2)	((1,675 x 1,919 x 802) x 2) + ((1,282 x 1,919 x 802) x 2)
Weight	Net	kg	(362 x 1) + (362 x 1) + (300 x 1) + (300 x 1)	(362 x 1) + (362 x 1) + (300 x 1) + (300 x 1)
	Shipping	kg	(372 x 1) + (372 x 1) + (310 x 1) + (310 x 1)	(372 x 1) + (372 x 1) + (310 x 1) + (310 x 1)
Refrigerant	Type	-	R410A	R410A
	Precharged Amount	kg	64.0	64.0
	t-CO ₂ eq.	-	133.600	133.600
	Control Type	-	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø22.20 (7/8)	Ø22.20 (7/8)
	Gas	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
Sound Pressure Level (Outdoor Unit)	Cooling	dB (A)	69.6	69.8
	Heating	dB (A)	70.7	70.9
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	91.3	91.5
	Heating	dB (A)	93.9	94.5
Connecting Cable	Communication Cable (VCTF-SB)	mm² x cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64

1) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.

ARUM900LTE6 / ARUM920LTE6



HP			90	92
Classification	Chassis	-	UXC + UXC + UXC + UXB	UXC + UXC + UXC + UXC
	Combination Unit	-	ARUM240LTE6	ARUM240LTE6
			ARUM240LTE6	ARUM240LTE6
			ARUM220LTE6	ARUM220LTE6
			ARUM200LTE6	ARUM220LTE6
Power Supply		V / Ø / Hz	380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW	252.0	257.6
Heating Capacity	Rated	kW	252.0	257.6
	Max	kW	283.5	289.8
Power Input (Cooling)	Rated	kW	91.84	96.30
Power Input (Heating)	Rated	kW	65.82	69.14
Efficiency	EER (Rated)	W/W	2.74	2.67
	COP (Rated)	W/W	3.83	3.73
	SEER	Wh/Wh	7.36	7.06
	SCOP	Wh/Wh	4.59	4.47
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	(430 x 1) + (430 x 1) + (430 x 1) + (320 x 1)	(430 x 1) + (430 x 1) + (430 x 1) + (430 x 1)
	Discharge direction (Side / Top)		Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct
	Output	W x No.	(1,500 x 2) + (1,500 x 2) + (1,500 x 2) + (900 x 2)	(1,500 x 2) + (1,500 x 2) + (1,500 x 2) + (1,500 x 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1 x 8	62.1 x 8
	Number of Revolution	rev./min	3,600 x 8	3,600 x 8
	Motor Output	W x No.	5,300 x 8	5,300 x 8
	Oil Type	-	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	((1,640 x 1,745 x 760) x 3) + ((1,240 x 1,745 x 760) x 1)	(1,640 x 1,745 x 760) x 4
	Shipping (W x H x D)	mm	((1,675 x 1,919 x 802) x 3) + ((1,282 x 1,919 x 802) x 1)	(1,675 x 1,919 x 802) x 4
Weight	Net	kg	(362 x 1) + (362 x 1) + (362 x 1) + (300 x 1)	(362 x 1) + (362 x 1) + (362 x 1) + (362 x 1)
	Shipping	kg	(372 x 1) + (372 x 1) + (372 x 1) + (310 x 1)	(372 x 1) + (372 x 1) + (372 x 1) + (372 x 1)
Refrigerant	Type	-	R410A	R410A
	Precharged Amount	kg	64.0	64.0
	t-CO₂ eq.	-	133.600	133.600
	Control Type	-	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø22.20 (7/8)	Ø22.20 (7/8)
	Gas	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
Sound Pressure Level (Outdoor Unit)	Cooling	dB (A)	70.2	70.5
	Heating	dB (A)	71.5	72.0
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	91.1	90.5
	Heating	dB (A)	94.3	94.0
Connecting Cable	Communication Cable (VCTF-SB)	mm² × cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64

1) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.

ARUM940LTE6 / ARUM960LTE6



HP			94	96
Classification	Chassis	-	UXC + UXC + UXC + UXC	UXC + UXC + UXC + UXC
	Combination Unit	-	ARUM240LTE6 ARUM240LTE6 ARUM240LTE6 ARUM220LTE6	ARUM240LTE6 ARUM240LTE6 ARUM240LTE6 ARUM240LTE6
Power Supply		V / Ø / Hz	380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW	263.2	268.8
Heating Capacity	Rated	kW	263.2	268.8
	Max	kW	296.1	302.4
Power Input (Cooling)	Rated	kW	100.50	104.60
Power Input (Heating)	Rated	kW	71.79	74.44
Efficiency	EER (Rated)	W/W	2.62	2.57
	COP (Rated)	W/W	3.67	3.61
	SEER	Wh/Wh	6.98	6.91
	SCOP	Wh/Wh	4.39	4.31
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m ³ /min x No.	(430 x 1) + (430 x 1) + (430 x 1) + (430 x 1)	(430 x 1) + (430 x 1) + (430 x 1) + (430 x 1)
	Discharge direction (Side / Top)		Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct
Compressor	Output	W x No.	(1,500 x 2) + (1,500 x 2) + (1,500 x 2) + (1,500 x 2)	(1,500 x 2) + (1,500 x 2) + (1,500 x 2) + (1,500 x 2)
	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm ³ /rev	62.1 x 8	62.1 x 8
	Number of Revolution	rev./min	3,600 x 8	3,600 x 8
	Motor Output	W x No.	5,300 x 8	5,300 x 8
	Oil Type	-	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	(1,640 x 1,745 x 760) x 4	(1,640 x 1,745 x 760) x 4
	Shipping (W x H x D)	mm	(1,675 x 1,919 x 802) x 4	(1,675 x 1,919 x 802) x 4
Weight	Net	kg	(362 x 1) + (362 x 1) + (362 x 1) + (362 x 1)	(362 x 1) + (362 x 1) + (362 x 1) + (362 x 1)
	Shipping	kg	(372 x 1) + (372 x 1) + (372 x 1) + (372 x 1)	(372 x 1) + (372 x 1) + (372 x 1) + (372 x 1)
Refrigerant	Type	-	R410A	R410A
	Precharged Amount	kg	64.0	64.0
	t-CO ₂ eq.	-	133.600	133.600
	Control Type	-	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø22.20 (7/8)	Ø22.20 (7/8)
	Gas	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø41.30 (1-5/8)	Ø41.30 (1-5/8)
Sound Pressure Level (Outdoor Unit)	Cooling	dB (A)	70.8	71.0
	Heating	dB (A)	72.0	72.0
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	90.8	91.0
	Heating	dB (A)	94.0	94.0
Connecting Cable	Communication Cable (VCTF-SB)	mm ² × cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64

1) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.

1. Eurovent Test Condition : For more info regarding program consult www.eurovent-certification.com

2. Capacities are based on the following conditions :

- Cooling : Indoor 27°C (80.6°F) DB / 19°C (66.2°F) WB Outdoor 35°C (95°F) DB / 24°C (75.2°F) WB
- Heating : Indoor 20°C (68°F) DB / 15°C (59°F) WB Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB
- Piping Length : Interconnected Pipe Length = 7.5m
- Elevation Difference (Outdoor ~ Indoor Unit) is 0m.

3. Wiring cable size must comply with the applicable local and national code.

4. Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard.

Refer to the model specifications for nominal conditions. (Power source and Ambient temperature, etc.)

Sound levels can be increased in accordance with installation and operating conditions. (Operating conditions include some functional condition like Static Pressure mode, air guide use, Room target temperature setting, etc and these functions are different in accordance with each model).

Sound level will vary depending on a range of factors such as the construction (acoustic absorption coefficient) of particular room in which the equipment in installed.

5. Explanation of Terms

- EER : Energy Efficiency Ratio (Cooling)
- SEER : Seasonal Energy Efficiency Ratio (Refer to Typical Cooling Season)
- COP : Coefficient Of Performance (Heating)
- SCOP : Seasonal Coefficient Of Performance (Refer to Typical Heating Season)

6. Due to our policy of innovation some specifications may be changed without notification.


7. This product contains Fluorinated greenhouse gas. (R410A, GWP (Global warming potential) = 2,087.5)

MULTI V™ i R32

Highlight of the R32 Refrigerant

Low GWP

- More eco-friendly refrigerant compliant with regulation




※ More precaution should be needed to use R32 refrigerant due to slightly higher toxicity level.

1) Source : Global Warming Potential Values (2007, AR4)

2) Based on MULTI V i specification. This ratio is general for helping understanding. It may differ depending on the each product.

Single Component

- Easy to handle, reuse and recycle
- Affordable and readily available



High Volumetric Energy

- Lower compressor displacement




Less Refrigerant Charge

- Savings on cost of injecting & replacing refrigerant
- Savings on purchase of refrigerant



Less Charge, Less Carbon Emission System

MULTI V i R32 can save Max. 14% of refrigerant amount compared to R410A system, which leads to reduced carbon dioxide emissions.

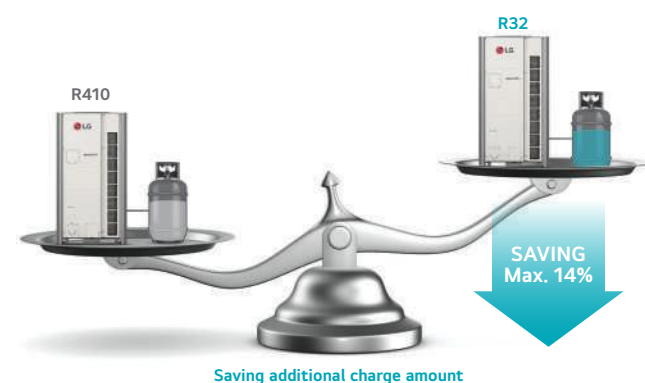


※ The information is based on Product Data Book.

(R410A system model: ARU***LTE6, R32 system model: ZRUM***LTE6)

※ Results may vary depending on the environment.

More Efficient Hot Water Supply Solution

MULTI V i with Hydro kit provides floor heating and hot water supply without using gas. It is a more environmentally friendly system with higher energy efficiency and lower carbon emissions.

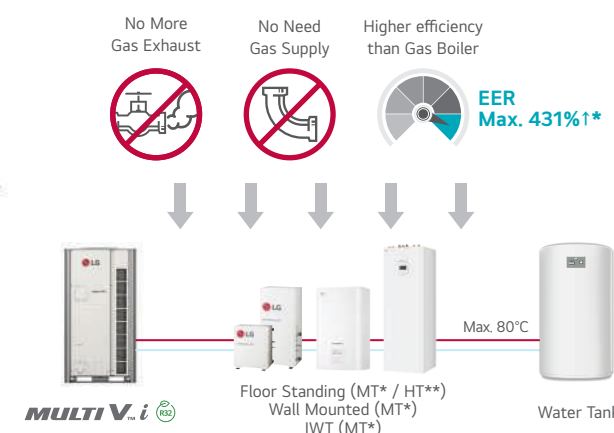


* These are the company's experimental values and experimental conditions, and may differ from the actual usage environment. In addition, power consumption may increase as the outside temperature decreases. Gas Boiler: 0.87, Hydro Kit: 3.75 (Model: ARNH10GK2A4 / 100% combination / Outdoor 7°CDB, water inlet 30°C, water outlet 35°C)

** MT: Mid Temperature, HT: High Temperature, WM: Wall Mounted

※ Results may vary depending on the environment.

Safety Device Response Scenarios


When a refrigerant leak occurs in the indoor unit or in the piping between the Heat Recovery (HR) Unit and the indoor unit, the system operates as follows: All indoor units will stop operating even if only one indoor unit has a leak. Alternatively, the shut-off valve of the leaking indoor unit will close, and the leaking unit will stop while other indoor units continue to operate. This integration is designed to enhance safety by quickly identifying leaks and preventing the spread of refrigerants to ensure compliance with refrigerant regulations.

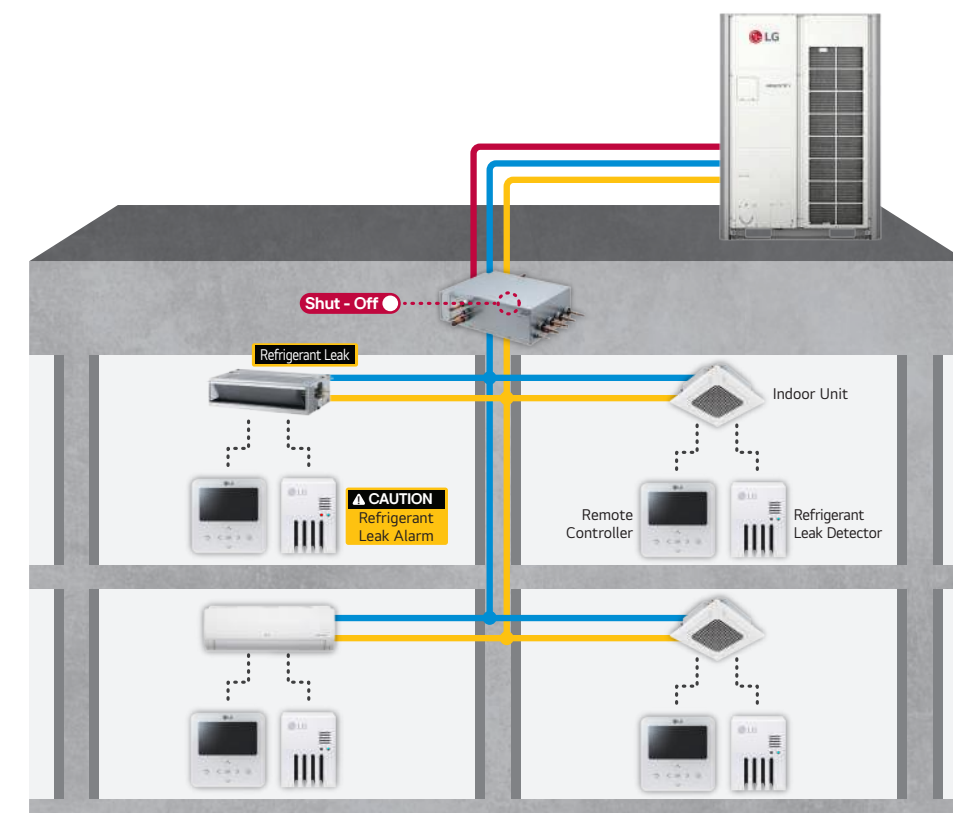

R32 Indoor Unit Design Guide

A HVAC system using R32 refrigerant requires the minimum room area because of its flammability and it should be designed by LATS HVAC.

Ceiling Mounted (Installation Height : 2.2 m)

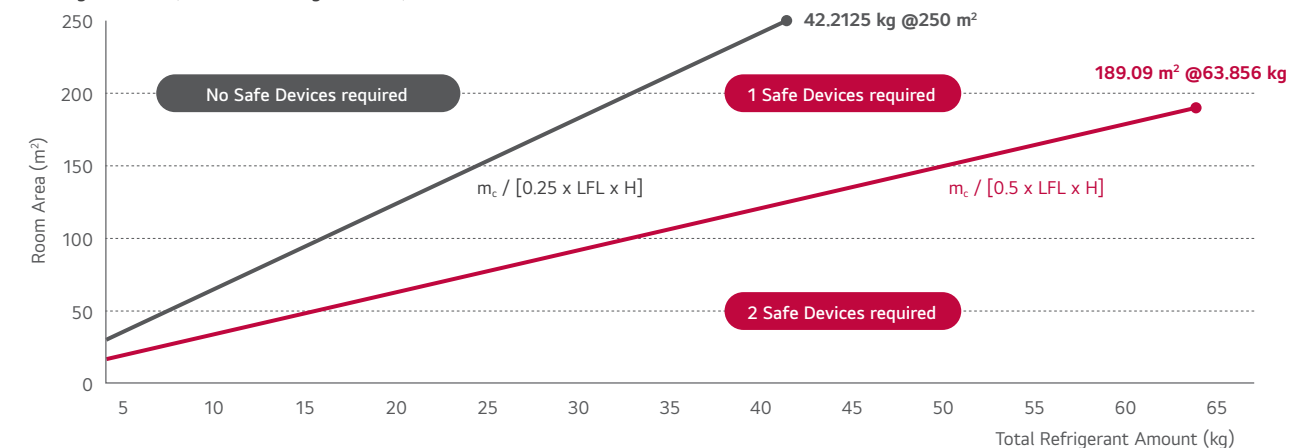

* One safety device: Refrigerant leak detector with alarming function

** Two or more device: Refrigerant leak detector + ventilator or Refrigerant leak detector + shut-off valve

ZRUM080LTE6 / ZRUM100LTE6
ZRUM120LTE6



LG participates in the ECP programme for EUROVENT VRF program. Check ongoing validity of certification : www.eurovent-certification.com

	MODEL	UNIT	ZRUM080LTE6	ZRUM100LTE6	ZRUM120LTE6
Classification	Chassis	-	UXA	UXA	UXA
	Combination Unit	-	ZRUM080LTE6	ZRUM100LTE6	ZRUM120LTE6
Power Supply		V / Ø / Hz	380-400-415 / 3 / 50	380-400-415 / 3 / 50	380-400-415 / 3 / 50
Cooling Capacity	Rated	kW	22.4	28.0	33.6
Heating Capacity	Rated	kW	22.4	28.0	33.6
	Max	kW	25.2	31.5	37.8
Power Input (Cooling)	Rated	kW	6.10	8.33	11.67
Power Input (Heating)	Rated	kW	5.16	6.22	7.76
Efficiency	EER (Rated)	W/W	3.67	3.36	2.88
	COP (Rated)	W/W	4.34	4.50	4.33
	SEER	Wh/Wh	8.28	8.11	7.94
	SCOP	Wh/Wh	4.45	4.52	4.99
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	220 x 1	220 x 1	220 x 1
	Discharge direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
	Output	W x No.	1,200 x 1	1,200 x 1	1,200 x 1
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1	62.1	62.1
	Number of Revolution	rev./min	3,600	3,600	3,600
	Motor Output	W x No.	5,300 x 1	5,300 x 1	5,300 x 1
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	930 x 1,745 x 760	930 x 1,745 x 760	930 x 1,745 x 760
	Shipping (W x H x D)	mm	965 x 1,919 x 802	965 x 1,919 x 802	965 x 1,919 x 802
Weight	Net	kg	215	215	215
	Shipping	kg	225	225	225
Refrigerant	Type	-	R32	R32	R32
	Precharged Amount	kg	7.5	8.5	8.5
	t-CO ₂ eq.	-	5.063	5.738	5.738
	Control Type	-	EEV	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)
	Gas	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø22.2 (7/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø22.2 (7/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø19.05 (3/4)
Sound Pressure Level* (Outdoor Unit)	Cooling	dB (A)	57	57.5	59
	Heating	dB (A)	58	58.5	60
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	78	79	80
	Heating	dB (A)	78	79	82
Connecting Cable	Communication Cable (VCTF-SB)	mm² × cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	13 (20)	16 (25)	20 (30)

*: Sound Pressure is not a value declared on Eurovent Program.
Note :
1. Due to our policy of innovation some specifications may be changed without notification.

ZRUM140LTE6 / ZRUM160LTE6
ZRUM180LTE6



LG participates in the ECP programme for EUROVENT VRF program. Check ongoing validity of certification : www.eurovent-certification.com

	MODEL	UNIT	ZRUM140LTE6	ZRUM160LTE6	ZRUM180LTE6
Classification	Chassis	-	UXB	UXB	UXB
	Combination Unit	-	ZRUM140LTE6	ZRUM160LTE6	ZRUM180LTE6
Power Supply		V / Ø / Hz	380-400-415 / 3 / 50	380-400-415 / 3 / 50	380-400-415 / 3 / 50
Cooling Capacity	Rated	kW	39.2	44.8	50.4
Heating Capacity	Rated	kW	39.2	44.8	50.4
	Max	kW	44.1	50.4	56.7
Power Input (Cooling)	Rated	kW	11.88	15.45	14.40
Power Input (Heating)	Rated	kW	8.43	10.09	10.59
Efficiency	EER (Rated)	W/W	3.30	2.90	3.50
	COP (Rated)	W/W	4.65	4.44	4.76
	SEER	Wh/Wh	8.55	7.97	8.65
	SCOP	Wh/Wh	5.17	5.46	4.81
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.	320 x 1	320 x 1	320 x 1
	Discharge direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
	Output	W x No.	900 x 2	900 x 2	900 x 2
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev	62.1	62.1	62.1 x 2
	Number of Revolution	rev./min	3,600	3,600	3,600 x 2
	Motor Output	W x No.	5,300 x 1	5,300 x 1	5,300 x 2
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	1,240 x 1,745 x 760	1,240 x 1,745 x 760	1,240 x 1,745 x 760
	Shipping (W x H x D)	mm	1,282 x 1,919 x 802	1,282 x 1,919 x 802	1,282 x 1,919 x 802
Weight	Net	kg	255	255	305
	Shipping	kg	265	265	315
Refrigerant	Type	-	R32	R32	R32
	Precharged Amount	kg	11.4	11.4	14
	t-CO ₂ eq.	-	7.695	7.695	9.450
	Control Type	-	EEV	EEV	EEV
Connecting Pipe	Liquid	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Gas	mm (inch)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)
	High Pressure Gas (Heat Recovery)	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
Sound Pressure Level* (Outdoor Unit)	Cooling	dB (A)	60	60.5	61
	Heating	dB (A)	61	61.5	62
Sound Power Level (Outdoor Unit)	Cooling	dB (A)	81	85	85
	Heating	dB (A)	81	85	86
Connecting Cable	Communication Cable (VCTF-SB)	mm² × cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA	23 (35)	26 (40)	29 (45)

*: Sound Pressure is not a value declared on Eurovent Program.
Note :
1. Due to our policy of innovation some specifications may be changed without notification.

ZRUM200LTE6 / ZRUM220LTE6
ZRUM240LTE6



¹⁾ LG participates in the ECP programme for EUROVENT VRF program. Check ongoing validity of certification : www.eurovent-certification.com

			MODEL	UNIT	ZRUM200LTE6	ZRUM220LTE6	ZRUM240LTE6
Classification	Chassis	-			UXB	UXA + UXA	UXB + UXA
	Combination Unit	-			ZRUM200LTE6	ZRUM120LTE6 ZRUM100LTE6	ZRUM140LTE6 ZRUM100LTE6
Power Supply		V / Ø / Hz			380-400-415 / 3 / 50	380-400-415 / 3 / 50	380-400-415 / 3 / 50
Cooling Capacity	Rated	kW			56.0	61.6	67.2
Heating Capacity	Rated	kW			56.0	61.6	67.2
	Max	kW			63.0	69.3	75.6
Power Input (Cooling)	Rated	kW			17.54	19.98	20.21
Power Input (Heating)	Rated	kW			12.64	13.99	14.65
Efficiency	EER (Rated)	W/W			3.19	3.08	3.33
	COP (Rated)	W/W			4.43	4.40	4.59
	SEER	Wh/Wh			8.42	8.03	8.33
	SCOP	Wh/Wh			5.13	4.76	4.85
Outdoor Fan	Type	-			Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.			320 x 1	(220 x 1) + (220 x 1)	(320 x 1) + (220 x 1)
	Discharge direction (Side / Top)				Top	Top	Top
Outdoor Fan Motor	Drive	-			Direct	Direct	Direct
	Output	W x No.			900 x 2	(1,200 x 1) + (1,200 x 1)	(900 x 2) + (1,200 x 1)
Compressor	Type	-			Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev			62.1 x 2	62.1 x 2	62.1 x 2
	Number of Revolution	rev./min			3,600 x 2	3,600 x 2	3,600 x 2
	Motor Output	W x No.			5,300 x 2	5,300 x 2	5,300 x 2
	Oil Type	-			FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-			Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm			1,240 x 1,745 x 760	(930 x 1,745 x 760) x 2	(1,240 x 1,745 x 760) x 1 + (930 x 1,745 x 760) x 1
	Shipping (W x H x D)	mm			1,282 x 1,919 x 802	(965 x 1,919 x 802) x 2	(1,282 x 1,919 x 802) x 1 + (965 x 1,919 x 802) x 1
Weight	Net	kg			305	215 x 2	(255 x 1) + (215 x 1)
	Shipping	kg			315	225 x 2	(265 x 1) + (225 x 1)
Refrigerant	Type	-			R32	R32	R32
	Precharged Amount	kg			14	17	19.9
	t-CO ₂ eq.	-			9.450	11.475	13.433
	Control Type	-			EEV	EEV	EEV
Connecting Pipe	Liquid	mm (inch)			Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Gas	mm (inch)			Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)			Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
	High Pressure Gas (Heat Recovery)	mm (inch)			Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)
Sound Pressure Level* (Outdoor Unit)	Cooling	dB (A)			62	61.3	61.9
	Heating	dB (A)			63.5	62.3	62.9
Sound Power Level (Outdoor Unit)	Cooling	dB (A)			86	82.5	83.1
	Heating	dB (A)			89	83.8	83.1
Connecting Cable	Communication Cable (VCTF-SB)	mm² × cores			1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA			32 (50)	35 (56)	39 (61)

*: Sound Pressure is not a value declared on Eurovent Program
1) Applying to 20HP outdoor units only.
Note :
1. Due to our policy of innovation some specifications may be changed without notification.

ZRUM260LTE6 / ZRUM280LTE6



			MODEL	UNIT	ZRUM260LTE6	ZRUM280LTE6
Classification	Chassis	-			UXB + UXA	UXB + UXA
	Combination Unit	-			ZRUM140LTE6 ZRUM120LTE6	ZRUM160LTE6 ZRUM120LTE6
Power Supply		V / Ø / Hz			380-415 / 3 / 50	380-415 / 3 / 50
Cooling Capacity	Rated	kW			72.8	78.4
Heating Capacity	Rated	kW			72.8	78.4
	Max	kW			81.9	88.2
Power Input (Cooling)	Rated	kW			23.53	27.10
Power Input (Heating)	Rated	kW			16.20	17.86
Efficiency	EER (Rated)	W/W			3.09	2.89
	COP (Rated)	W/W			4.49	4.39
	SEER	Wh/Wh			8.25	7.96
	SCOP	Wh/Wh			5.08	5.23
Outdoor Fan	Type	-			Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m³/min x No.			(320 x 1) + (220 x 1)	(320 x 1) + (220 x 1)
	Discharge direction (Side / Top)				Top	Top
Outdoor Fan Motor	Drive	-			Direct	Direct
	Output	W x No.			(900 x 2) + (1,200 x 1)	(900 x 2) + (1,200 x 1)
Compressor	Type	-			Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm³/rev			62.1 x 2	62.1 x 2
	Number of Revolution	rev./min			3,600 x 2	3,600 x 2
	Motor Output	W x No.			5,300 x 2	5,300 x 2
	Oil Type	-			FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-			Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm			(1,240 x 1,745 x 760) x 1 + (930 x 1,745 x 760) x 1	(1,240 x 1,745 x 760) x 1 + (930 x 1,745 x 760) x 1
	Shipping (W x H x D)	mm			(1,282 x 1,919 x 802) x 1 + (965 x 1,919 x 802) x 1	(1,282 x 1,919 x 802) x 1 + (965 x 1,919 x 802) x 1
Weight	Net	kg			(255 x 1) + (215 x 1)	(255 x 1) + (215 x 1)
	Shipping	kg			(265 x 1) + (225 x 1)	(265 x 1) + (225 x 1)
Refrigerant	Type	-			R32	R32
	Precharged Amount	kg			19.9	19.9
	t-CO ₂ eq.	-			13.433	13.433
	Control Type	-			EEV	EEV
Connecting Pipe	Liquid	mm (inch)			Ø15.88 (5/8)	Ø15.88 (5/8)
	Gas	mm (inch)			Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
	Low Pressure Gas (Heat Recovery)	mm (inch)			Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
	High Pressure Gas (Heat Recovery)	mm (inch)			Ø22.2 (7/8)	Ø22.2 (7/8)
Sound Pressure Level (Outdoor Unit)	Cooling	dB (A)			62.5	62.8
	Heating	dB (A)			63.5	63.8
Sound Power Level (Outdoor Unit)	Cooling	dB (A)			83.5	86.2
	Heating	dB (A)			84.5	86.8
Connecting Cable	Communication Cable (VCTF-SB)	mm² × cores			1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Connectable Indoor Units Number	Max. (Conditional)	EA			42 (64)	45 (56)

Note :
1. Due to our policy of innovation some specifications may be changed without notification.